

Online Backup Manager v7

Microsoft Exchange Database Backup & Restore Guide

15 September 2017

Copyright Notice

The use and copying of this product is subject to a license agreement. Any other use is prohibited. No part of this publication may be reproduced, transmitted, transcribed, stored in a retrieval system or translated into any language in any form by any means without prior written consent of THE SUPPLIER. Information in this manual is subject to change without notice and does not represent a commitment on the part of the vendor, THE SUPPLIER does not warrant that this document is error free. If you find any errors in this document, please report to THE SUPPLIER in writing.

This product includes software developed by the Apache Software Foundation (<http://www.apache.org/>).

Trademarks

Amazon S3 is registered trademark of Amazon Web Services, Inc. or its affiliates.

Apple and Mac OS X are registered trademarks of Apple Computer, Inc.

Dropbox is registered trademark of Dropbox Inc.

Google Cloud Storage and Google Drive are registered trademarks of Google Inc.

Lotus, Domino, Notes are registered trademark of IBM Corporation.

Microsoft, Windows, Microsoft Exchange Server, Microsoft SQL Server, Microsoft Hyper-V, Microsoft Azure, One Drive and One Drive for Business are registered trademarks of Microsoft Corporation.

Oracle and Java are registered trademarks of Oracle and/or its affiliates. Other names may be trademarks of their respective owners.

Oracle, Oracle 10g, Oracle 11g and MySQL are registered trademarks of Oracle Corporation.

Rackspace and OpenStack are registered trademarks of Rackspace US, Inc.

Red Hat, Red Hat Enterprise Linux, the Shadowman logo and JBoss are registered trademarks of Red Hat, Inc. www.redhat.com in the U.S. and other countries. Linux is a registered trademark of Linus Torvalds.

ShadowProtect is registered trademark of StorageCraft Technology Corporation.

VMware, ESX, ESXi, vCenter are registered trademarks of VMware, Inc.

All other product names are registered trademarks of their respective owners.

Disclaimer

THE SUPPLIER will not have or accept any liability, obligation or responsibility whatsoever for any loss, destruction or damage (including without limitation consequential loss, destruction or damage) however arising from or in respect of any use or misuse of reliance on this document. By reading and following the instructions in this document, you agree to accept unconditionally the terms of this Disclaimer and as they may be revised and/or amended from time to time by THE SUPPLIER without prior notice to you.

Revision History

Date	Descriptions	Type of modification
15 July 2016	First Draft	New
3 February 2017	Added instructions and screen shots for Encryption key handling in Ch. 2.1 & Ch. 4.2	New
5 April 2017	Added Encryption Type option in Ch.2.1 & Ch. 4.2	New

Table of Contents

1	Getting started	1
1.1	Introduction	1
1.2	General Best Practices and Recommendations	1
1.3	Best Practices and Recommendations for Exchange Server in Data Availability Group (DAG) only	4
1.4	Overview of MS Exchange Database Backup Process	5
2	Backing up Microsoft Exchange Database 2007/2010/2013/2016	6
2.1	Creating a MS Exchange Server Backup Set for Exchange Server 2007/2010/2013/2016	6
2.2	Running Backup Job for Microsoft Exchange Server 2007/2010/2013/2016	13
3	Restoring Microsoft Exchange Server 2007/2010/2013/2016	15
3.1	Pre-restoration Requirements	15
3.2	Restoring Exchange Database for Microsoft Exchange Server 2007/2010/2013/2016	16
4	Backing up Microsoft Exchange Server in Database Availability Group (DAG)	20
4.1	License Requirement to Backup all Exchange Server 2010/2013/2016 in DAG environment	20
4.2	Creating Backup Set for Microsoft Exchange Server 2010/2013/2016 (DAG)	20
5	Restore Microsoft Exchange Server 2010/2013/2016 in Database Availability Group (DAG)	27
5.1	Pre-restoration requirements	27
5.2	Restore Exchange Database to the Exchange with the active database	27
	Appendix	32
	Appendix A Exchange Server Backup Type	32
	Appendix B Restore Activities Log	34

1 Getting started

1.1 Introduction


This user guide aims at providing detailed information for backing up and restoring Microsoft Exchange Database with OBM.

1.2 General Best Practices and Recommendations

Please ensure that the following requirements are met by the Microsoft Exchange Server:


1. The latest version of OBM is installed on the Exchange server / DAG member services. For Exchange Server 2010/2013/2016, Database Availability Group (DAG) backup option is available, please refer to [Backing up Microsoft Exchange Server in Database Availability Group \(DAG\)](#) for details.
2. Ensure that all MS Exchange related services have been started, particularly the **MS Exchange Information Store** and **MS Exchange System Attendant Services**.

To verify this setting, launch **Services** in Windows by clicking **Start** then typing "Services" in the search box. All Exchange related services should be started by default, in case if it is not, turn it on by right clicking the item then selecting **Start**.

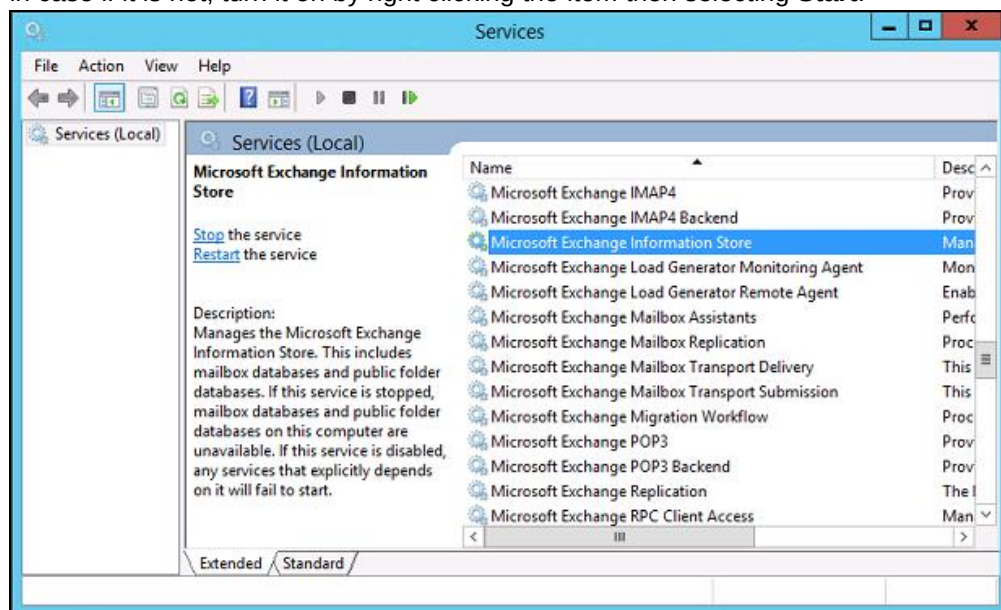

3. OBM must be installed on the Exchange server with mailbox role.
4. Make sure the Exchange Server has been updated to the latest roll-up patch of that specific service pack.
5. Make sure that circular logging is disabled for all Information Store(s) or Public Folder selected for backup.

- Make sure that the Microsoft Exchange Server add-on module has been enabled for your OBM user account. Contact your backup service provider for more details.

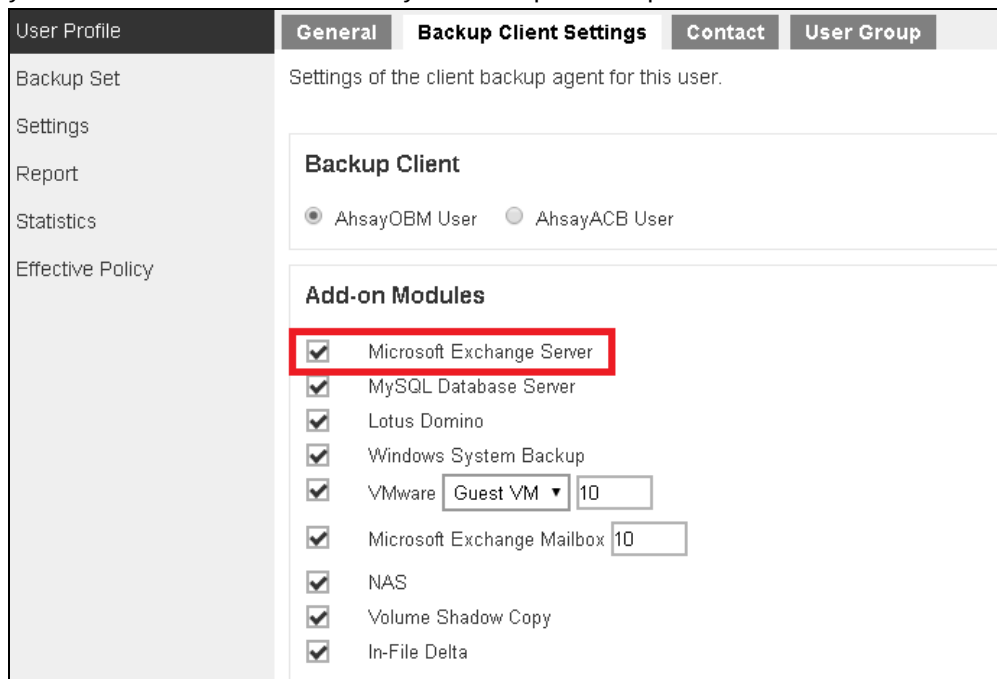

- The Exchange Server 2010/2013/2016 database files are no longer stored in the temporary directory during backup. However, the VSS-based Exchange backup will still require certain amount of disk space to operate. Microsoft suggested that certain shadow copy mechanism may require free space around 100% of the original database. Refer to the following URL for more information.
<http://msdn.microsoft.com/enus/library/exchange/aa579091%28v=exchg.140%29.aspx>
- Temporary Directory folder is used by OBM for storing backup set index files and any incremental or differential delta files generated during a backup job. To ensure optimal backup/restore performance, it is recommended that the folder is located on a local drive with plenty of free disk space.
- Ensure that the **Microsoft Exchange Writer** is installed and running on the Exchange Server, and the writer state is **Stable**. This can be verified by running the **vssadmin list writers** command.

Example:

```
C:\Users\Administrator>vssadmin list writers
vssadmin 1.1 - Volume Shadow Copy Service administrative
command-line tool
(C) Copyright 2001-2005 Microsoft Corp.

Writer name: 'System Writer'
  Writer Id: {e8132975-6f93-4464-a53e-1050253ae220}
  Writer Instance Id: {a2f2507d-b348-493a-9685-da3f20959e9d}
  State: [1] Stable
  Last error: No error

Writer name: 'COM+ REGDB Writer'
  Writer Id: {542da469-d3e1-473c-9f4f-7847f01fc64f}
  Writer Instance Id: {60b9b261-ab81-4c4d-be0f-5d432a4dea64}
  State: [1] Stable
  Last error: No error
```

Writer name: 'ASR Writer'
Writer Id: {be000cbe-11fe-4426-9c58-531aa6355fc4}
Writer Instance Id: {1aab9829-3b91-46bc-a7f1-ae9e1123c2fe}
State: [1] Stable
Last error: No error

Writer name: 'Microsoft Exchange Writer'
Writer Id: {76felac4-15f7-4bcd-987e-8e1acb462fb7}
Writer Instance Id: {2e8409fa-1dd8-483c-ba95-5c9277be0509}
State: [1] Stable
Last error: No error

Writer name: 'IIS Metabase Writer'
Writer Id: {59b1f0cf-90ef-465f-9609-6ca8b2938366}
Writer Instance Id: {3303e28e-afae-4c99-8f1a-2ce23e6455a7}
State: [1] Stable
Last error: No error

Writer name: 'FRS Writer'
Writer Id: {d76f5a28-3092-4589-ba48-2958fb88ce29}
Writer Instance Id: {d35e3901-f9b9-4fa6-86af-36b8a4872933}
State: [1] Stable
Last error: No error

Writer name: 'Shadow Copy Optimization Writer'
Writer Id: {4dc3bdd4-ab48-4d07-adb0-3bee2926fd7f}
Writer Instance Id: {8e19e851-95ca-4c97-813d-4bc51898c7ac}
State: [1] Stable
Last error: No error

Writer name: 'WMI Writer'
Writer Id: {a6ad56c2-b509-4e6c-bb19-49d8f43532f0}
Writer Instance Id: {0619e684-14f3-495b-be59-e35fc0ec212b}
State: [1] Stable
Last error: No error


Writer name: 'BITS Writer'
Writer Id: {4969d978-be47-48b0-b100-f328f07ac1e0}
Writer Instance Id: {94991e66-e5c7-47a4-a0c9-3771e4761262}
State: [1] Stable
Last error: No error

Writer name: 'Registry Writer'
Writer Id: {afbab4a2-367d-4d15-a586-71dbb18f8485}
Writer Instance Id: {73c66436-c2e8-4d46-b88a-d866617eb95d}
State: [1] Stable
Last error: No error

Writer name: 'NTDS'
Writer Id: {b2014c9e-8711-4c5c-a5a9-3cf384484757}
Writer Instance Id: {14cedc8b-4c51-4a12-85c4-8cf8aa3545b6}
State: [1] Stable
Last error: No error

Writer name: 'IIS Config Writer'
Writer Id: {2a40fd15-dfca-4aa8-a654-1f8c654603f6}
Writer Instance Id: {5939e29f-bf43-4a39-a6b7-e3a838e75e3e}
State: [1] Stable
Last error: No error

10. For Exchange server with Active Directory installed, a Windows System State backup must be performed regularly with the MS Exchange Server backup.
11. **(Applicable to Microsoft Exchange Server 2013/2016 only)**
If you are using Microsoft Exchange Server 2013/2016 on Windows Server 2012, please install **.Net Framework 3.5 Features** under **Server Manager > Dashboard > Add Roles and Features Wizard > Feature Page**.

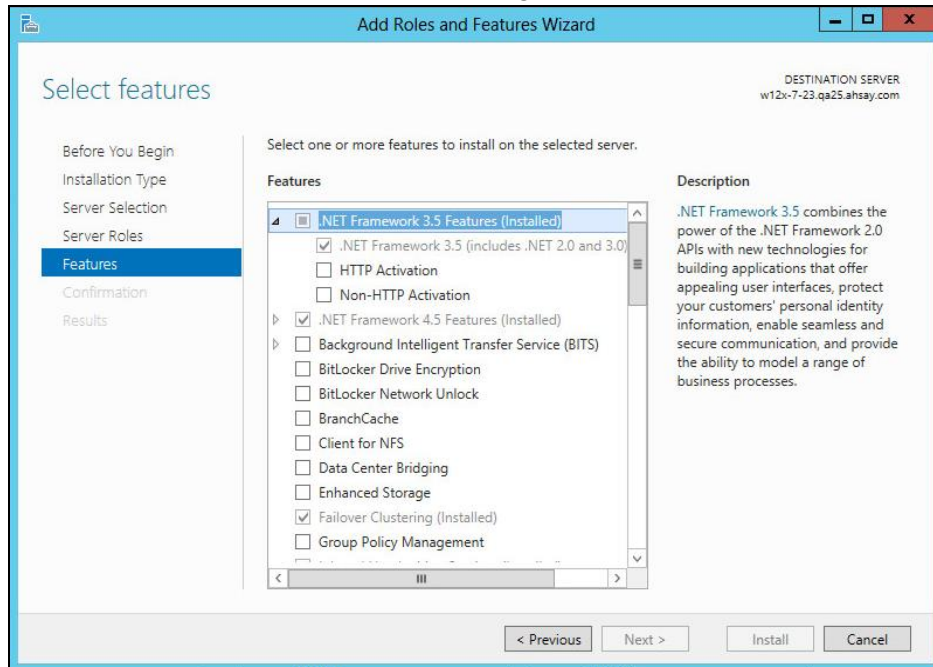

1.3 Best Practices and Recommendations for Exchange Server in Data Availability Group (DAG) only


1. System State backup must be performed regularly for the domain controller of the Exchange DAG setup.
2. Scheduled backup is required if you choose to back up with DAG option, as OBM on all DAG members will base on the scheduled backup time to start backups on individual DAG member at the same time.

A DAG backup cycle is considered complete only when scheduled backup on all DAG members have been carried out. An email report will be generated when a complete DAG backup cycle is taken place.

Please keep in mind that manual backup will only be considered as individual mail-level backup, and therefore will not be counted as part of the DAG backup cycle.
3. The MS Exchange Server Backup module will protect the Exchange server at the database level. If a full system backup (for bare-metal recovery) is required, please consider setting up a MS System Backup for each DAG member server.
4. To back up mailbox database within an Exchange DAG, OBM is required to be installed on each DAG member with mailbox role (e.g. servers that are hosting the mailbox databases). It is not necessary to install OBM on Exchange server with CAS (Client Access Server) role only.

1.4 Overview of MS Exchange Database Backup Process


The following steps are performed during an Exchange Database backup job:

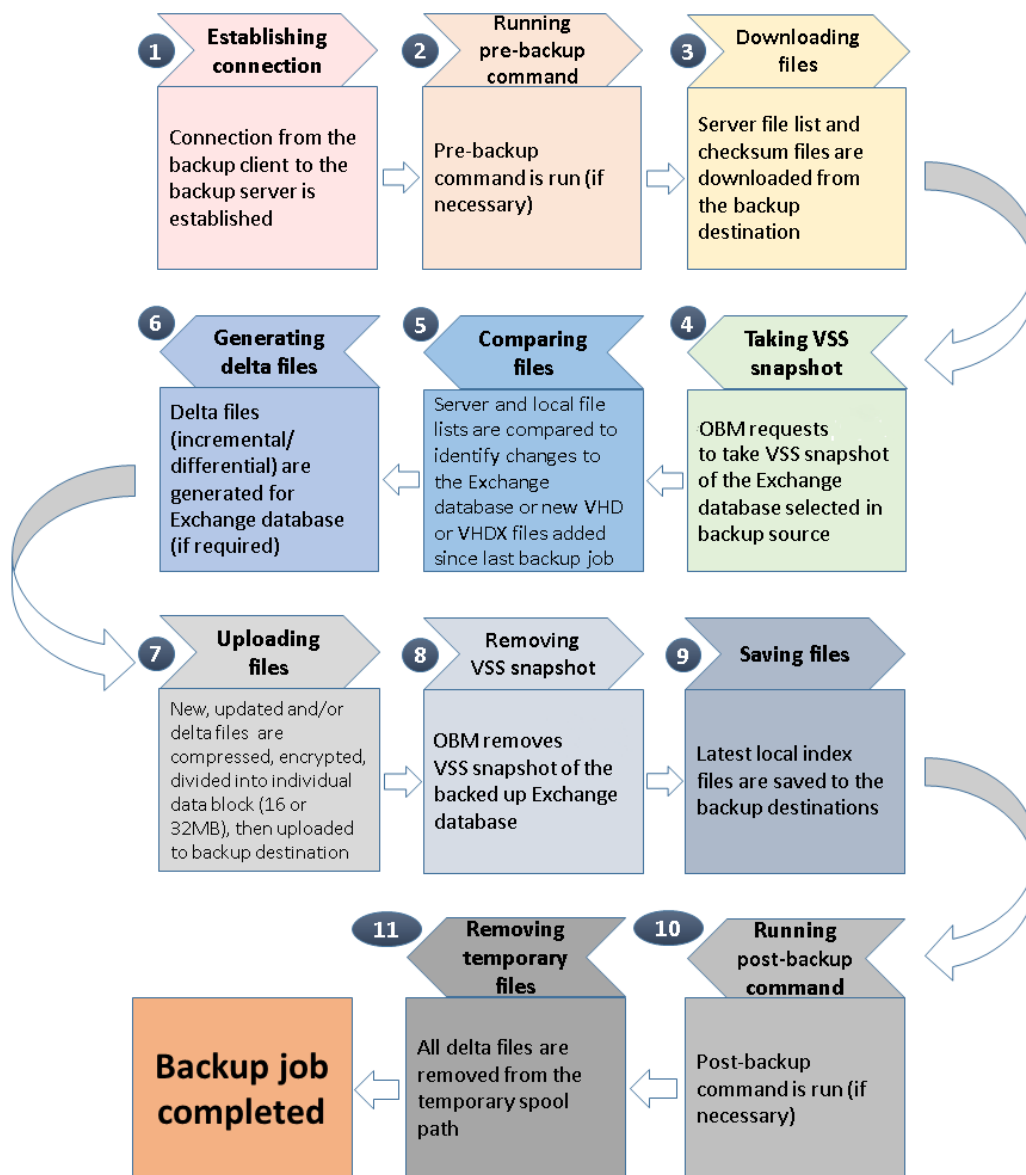


2 Backing up Microsoft Exchange Database 2007/2010/2013/2016

2.1 Creating a MS Exchange Server Backup Set for Exchange Server 2007/2010/2013/2016


1. Click the **Backup Sets** icon on the main interface of OBM.

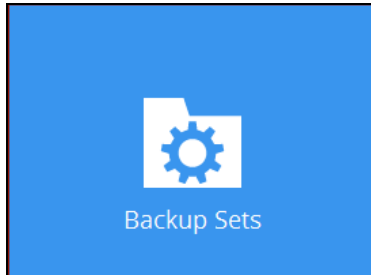


2. Create a new backup set by clicking the "+" icon next to **Add new backup set**.
3. Select the Backup set type as **MS Exchange Server Backup**. The system will automatically detect and select the Exchange Server version, make sure the version selected is correct. Name your new backup set and then click **Next** to proceed.

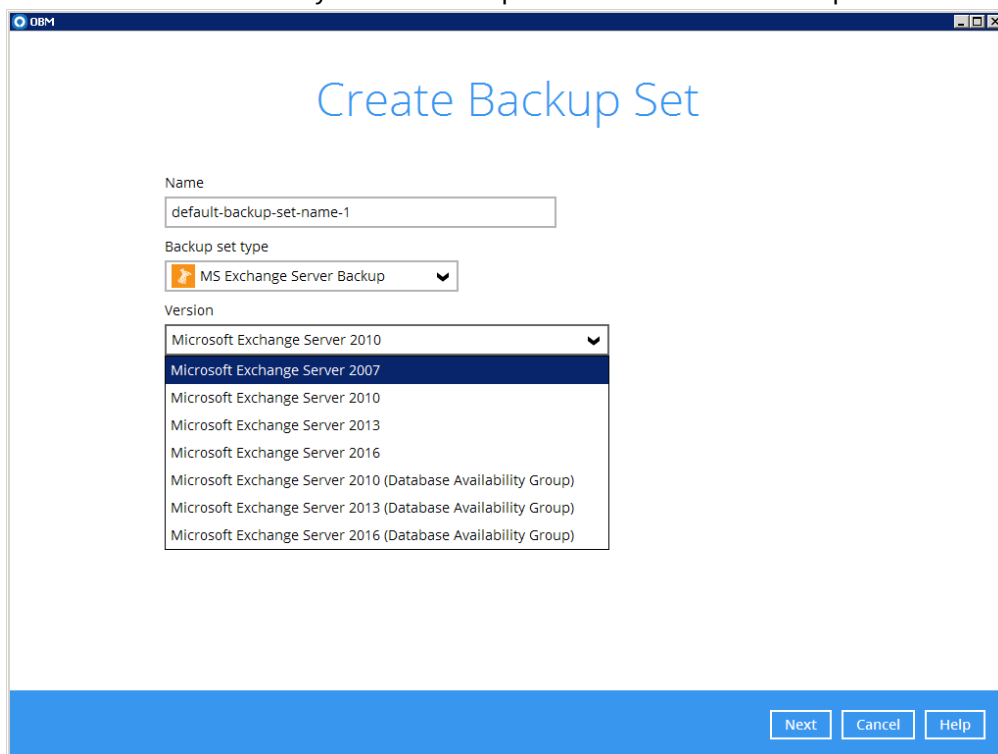A screenshot of the "Create Backup Set" dialog box in the OBM application. The dialog has a title bar with "OBM" and standard window controls. The main content area has the title "Create Backup Set" in blue. Below the title, there are three fields: "Name" with a text input containing "default-backup-set-name-1", "Backup set type" with a dropdown menu showing "MS Exchange Server Backup" and a plus icon, and "Version" with a dropdown menu showing a list of Microsoft Exchange Server versions. The "Version" dropdown is open, showing options: "Microsoft Exchange Server 2010", "Microsoft Exchange Server 2007" (highlighted), "Microsoft Exchange Server 2010", "Microsoft Exchange Server 2013", "Microsoft Exchange Server 2016", "Microsoft Exchange Server 2010 (Database Availability Group)", "Microsoft Exchange Server 2013 (Database Availability Group)", and "Microsoft Exchange Server 2016 (Database Availability Group)". At the bottom right, there are three buttons: "Next", "Cancel", and "Help".

4. In the **Backup Source** menu, select the Information Store for backup. Click **Next** to proceed.

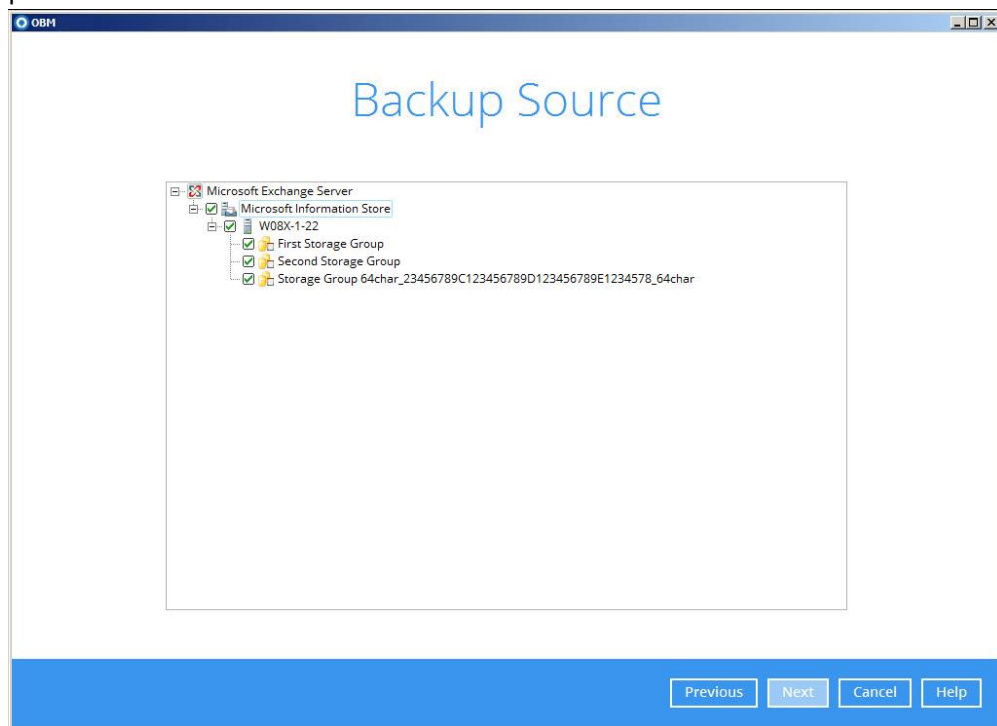


5. In the **Schedule** menu, you can configure a backup schedule for backup job to run automatically at your specified time interval. Click **Add** to add a new schedule, then click **Next** to proceed when you are done with the settings.

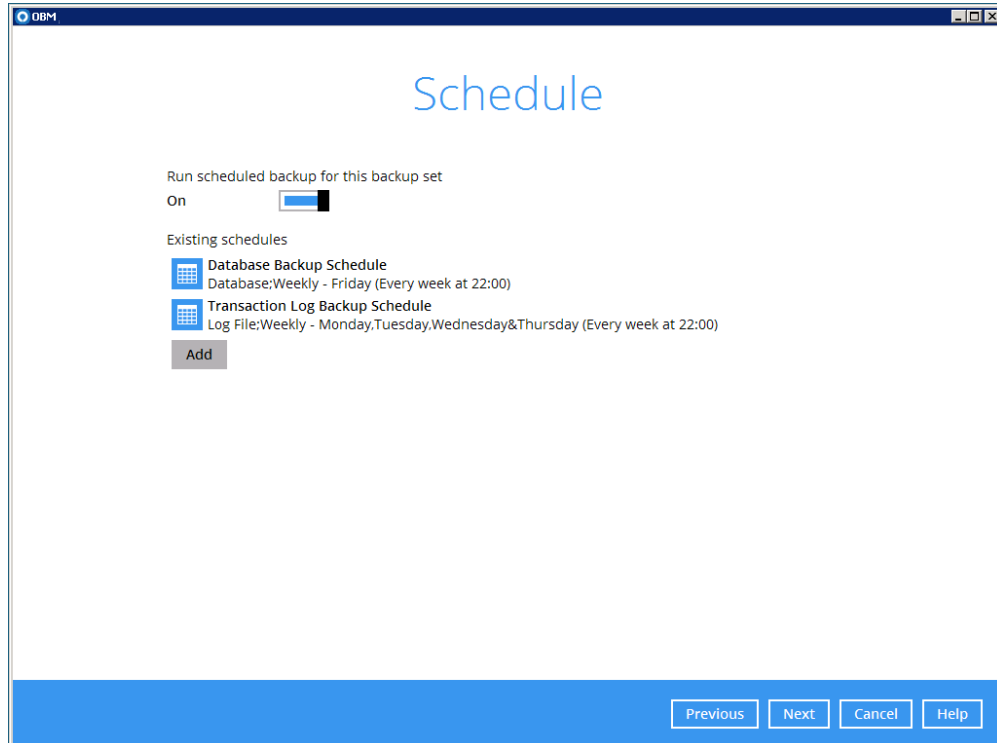

Note: By default, a database backup scheduled for every Friday at 22:00 and a log backup scheduled daily (except Friday) at 22:00 are created automatically.

6. In the **Destination** menu, select a backup destination where the backup data will be stored. Click the “+” icon next to **Add new storage destination / destination pool**.

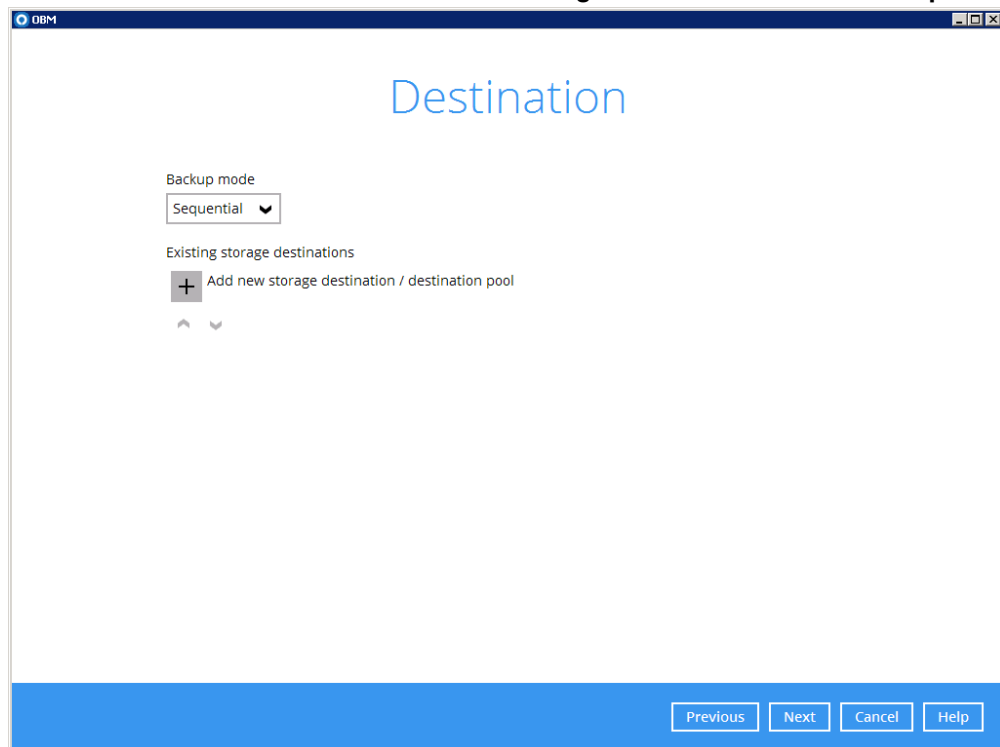

OBM


Destination

Backup mode
Sequential

Existing storage destinations
+ Add new storage destination / destination pool

Previous Next Cancel Help

7. Select the destination type and destination storage, then click **OK** to proceed.

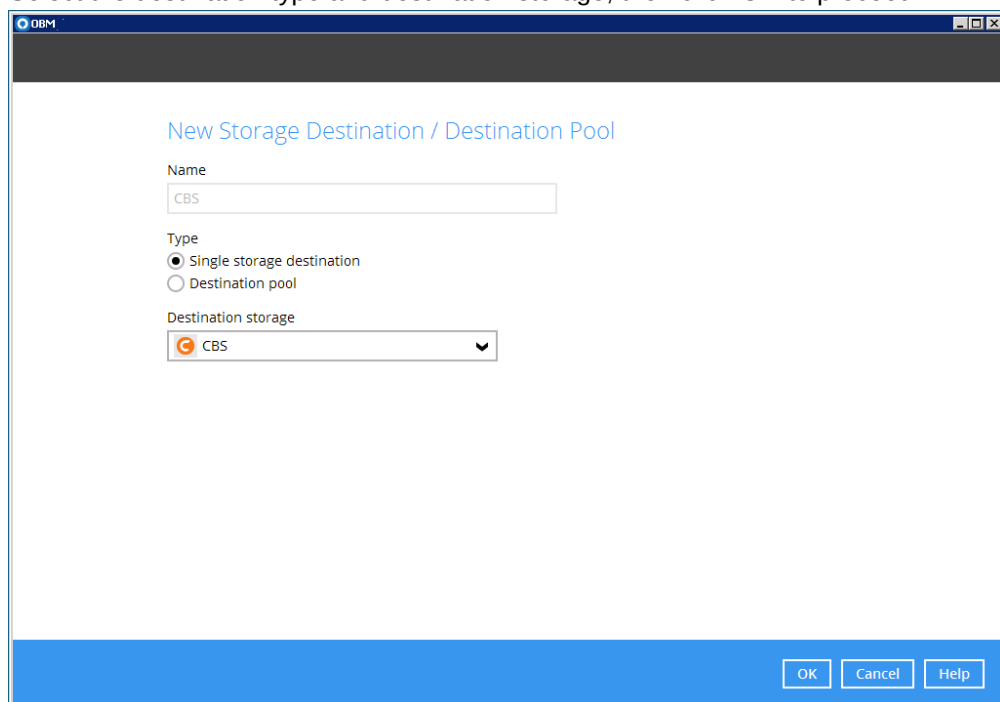

OBM

New Storage Destination / Destination Pool


Name
CBS

Type
☒ Single storage destination
☐ Destination pool

Destination storage
CBS


OK Cancel Help

8. When you are done with settings, click **Next** on the **Destination** menu page to proceed.

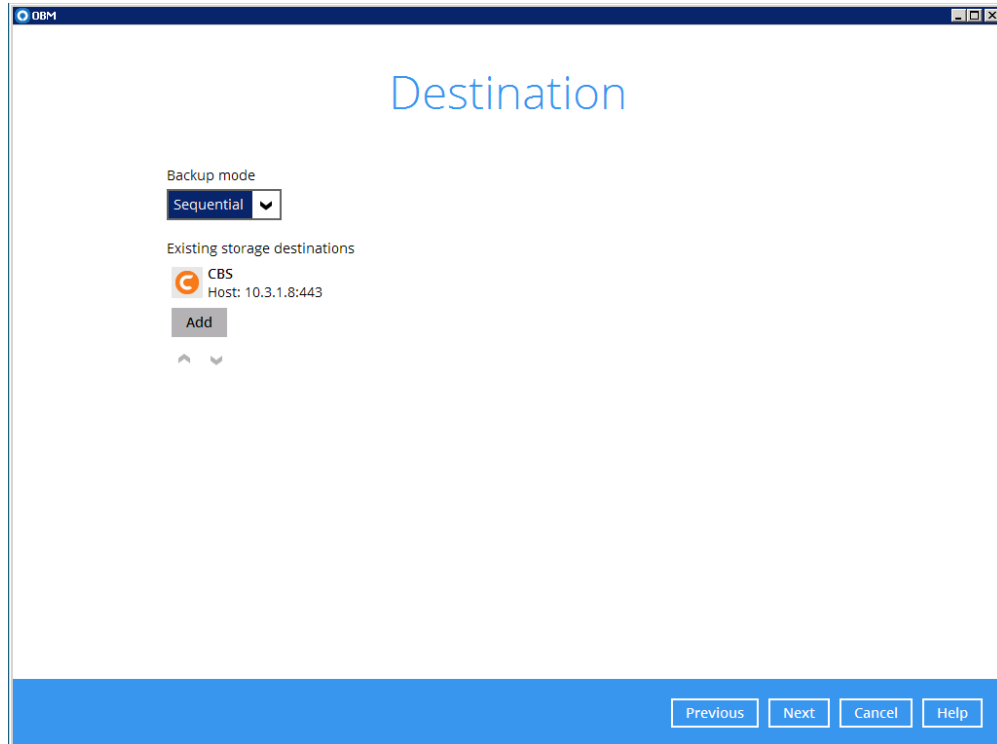

The screenshot shows the 'Destination' window in the OBM application. The title bar says 'OBM'. The main heading is 'Destination'. Under 'Backup mode', there is a dropdown menu set to 'Sequential'. Under 'Existing storage destinations', there is a list showing 'CBS' with 'Host: 10.3.1.8:443' and an 'Add' button. At the bottom right, there are four buttons: 'Previous', 'Next', 'Cancel', and 'Help'.

9. In the Encryption window, the default **Encrypt Backup Data** option is enabled with an encryption key preset by the system which provides the most secure protection.

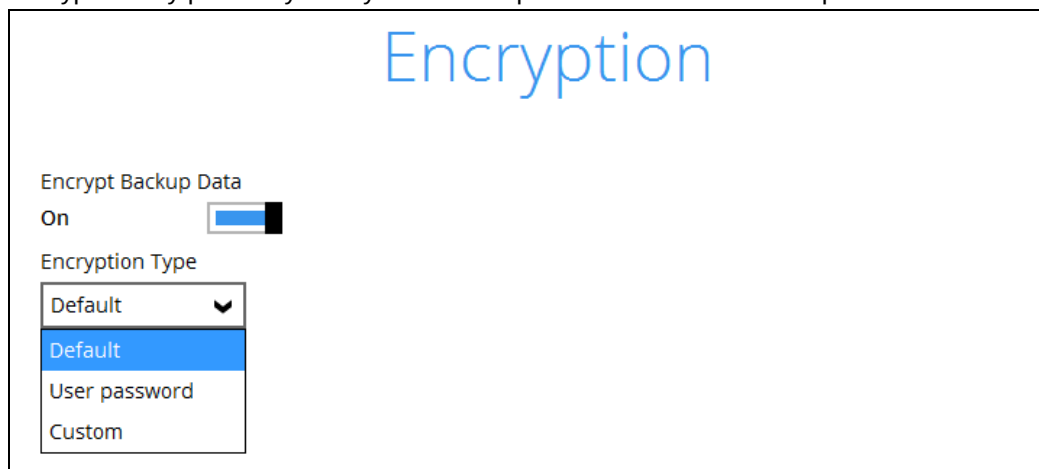


The screenshot shows the 'Encryption' window in the OBM application. The title bar says 'OBM'. The main heading is 'Encryption'. Under 'Encrypt Backup Data', there is a toggle switch set to 'On'. Under 'Encryption Type', there is a dropdown menu with 'Default' selected. The dropdown menu is open, showing 'Default', 'User password', and 'Custom' options.

You can choose from one of the following three Encryption Type options:

- **Default** – an encryption key with 44 alpha numeric characters will be randomly generated by the system
- **User password** – the encryption key will be the same as the login password of your OBM at the time when this backup set is created. Please be reminded that if you change the OBM login password later, the encryption keys of the backup sets previously created with this encryption type will remain unchanged.

- **Custom** – you can customize your encryption key, where you can set your own algorithm, encryption key, method and key length.

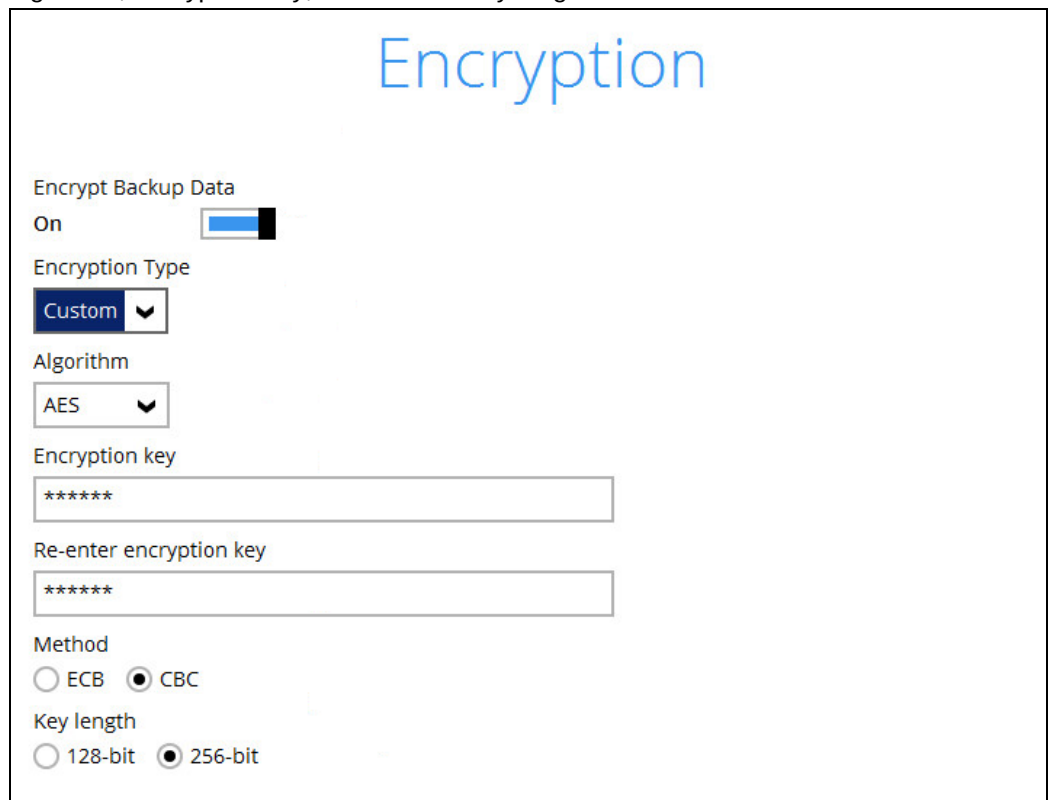


The screenshot shows the 'Encryption' settings window. At the top, the word 'Encryption' is displayed in a large blue font. Below it, the 'Encrypt Backup Data' toggle is set to 'On'. The 'Encryption Type' dropdown menu is set to 'Custom'. The 'Algorithm' dropdown menu is set to 'AES'. The 'Encryption key' field contains seven asterisks. The 'Re-enter encryption key' field also contains seven asterisks. The 'Method' section has two radio buttons: 'ECB' (unselected) and 'CBC' (selected). The 'Key length' section has two radio buttons: '128-bit' (unselected) and '256-bit' (selected).

WARNING: If a note of the encryption key is NOT taken, and the key is LOST, the data will be irretrievable. Always ensure you take a note of the encryption key.

Click **Next** when you are done setting.


10. If you have enabled the Encryption Key feature in the previous step, the following pop-up window shows, no matter which encryption type you have selected.

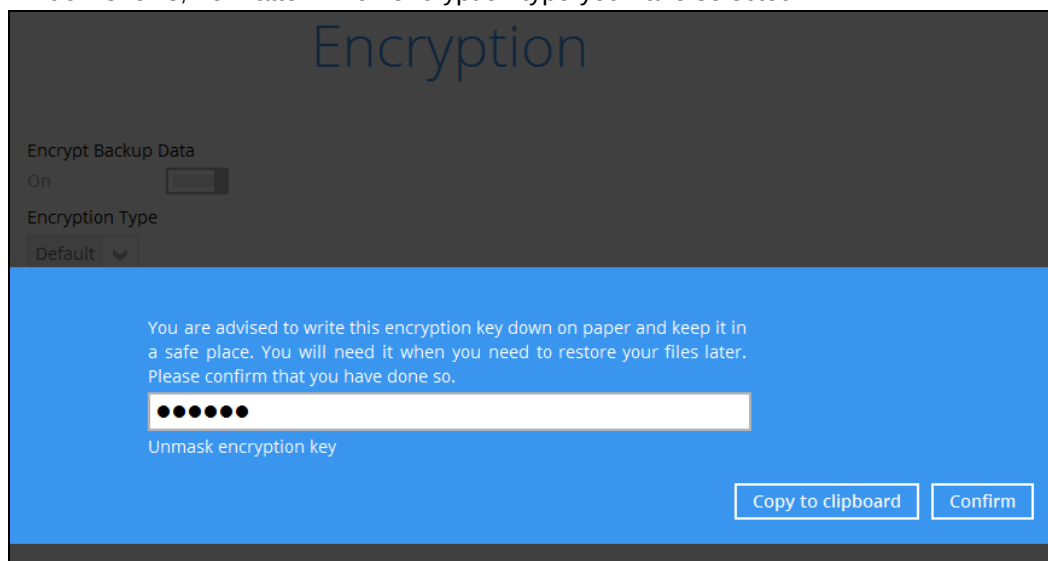

The screenshot shows a pop-up window titled 'Encryption'. The background is dark grey. The top section is dark grey and contains the following settings: 'Encrypt Backup Data' toggle is 'On', 'Encryption Type' dropdown is 'Default', and 'Method' radio buttons are 'ECB' (selected) and 'CBC' (unselected). The bottom section has a blue background. It contains a message: 'You are advised to write this encryption key down on paper and keep it in a safe place. You will need it when you need to restore your files later. Please confirm that you have done so.' Below the message is a text field containing seven asterisks. Below the text field is the label 'Unmask encryption key'. At the bottom right, there are two buttons: 'Copy to clipboard' and 'Confirm'.

The pop-up window has the following three options to choose from:


- **Unmask encryption key** – The encryption key is masked by default. Click this option to show the encryption key.

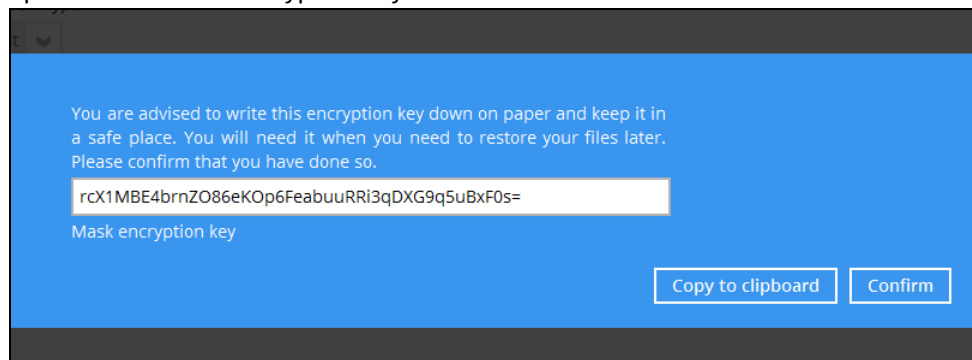

A blue pop-up window with a dark grey header and footer. The main content area is blue and contains the following text: "You are advised to write this encryption key down on paper and keep it in a safe place. You will need it when you need to restore your files later. Please confirm that you have done so." Below this text is a text input field containing the encryption key: "rcX1MBE4brnZO86eKOp6FeabuuRRI3qDXG9q5uBxF0s=". Below the input field is a label "Mask encryption key". At the bottom right of the window are two buttons: "Copy to clipboard" and "Confirm".


- **Copy to clipboard** – Click to copy the encryption key, then you can paste it in another location of your choice.
- **Confirm** – Click to exit this pop-up window and proceed to the next step

11. Enter the Windows login credentials for user authentication. Click **Next** to proceed.

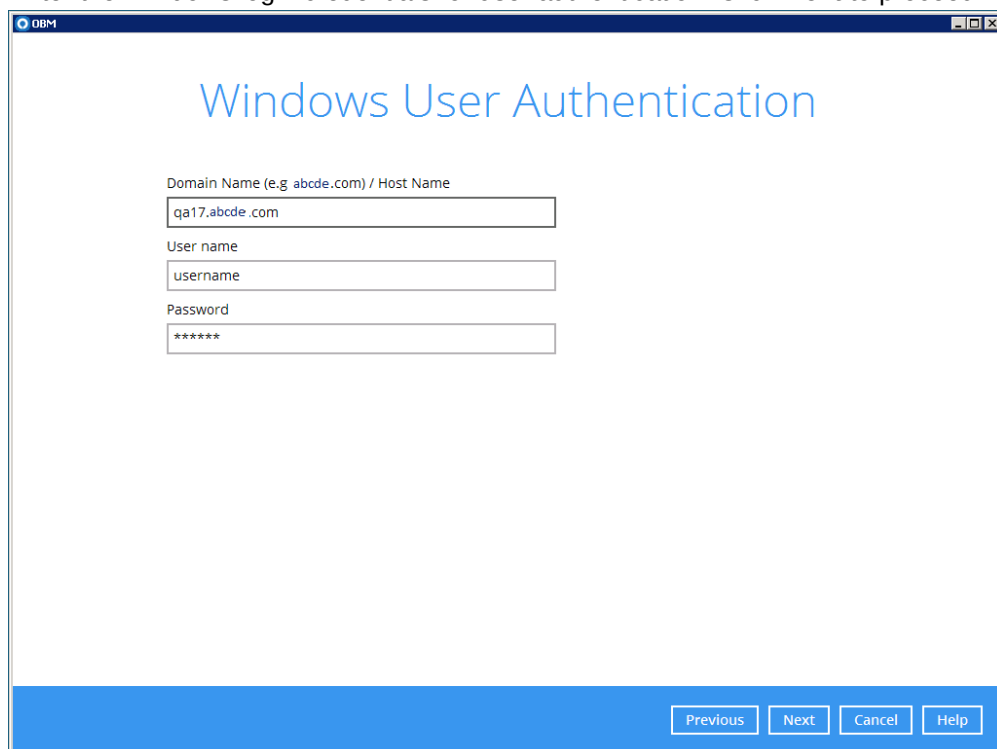

A screenshot of a "Windows User Authentication" window. The window has a blue title bar with "OBM" on the left and standard window controls on the right. The main content area is white and contains the title "Windows User Authentication" in blue. Below the title are four input fields: "Domain Name (e.g. abcde.com) / Host Name" with the value "qa17.abcde.com", "User name" with the value "username", and "Password" with the value "*****". At the bottom of the window is a blue bar with four buttons: "Previous", "Next", "Cancel", and "Help".

12. The following screen shows when the new backup set is created successfully.

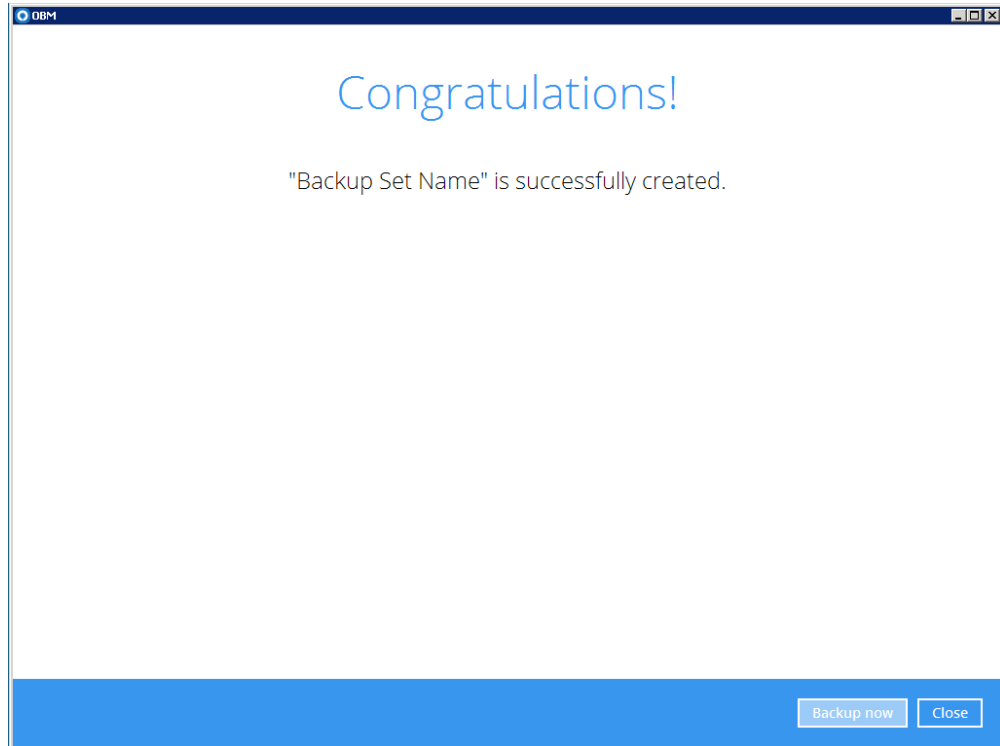


13. You can click **Backup now** to start a backup immediately, or you can run a backup job later by following the instructions in [Running Backup Job for Microsoft Exchange Server 2007/2010/2013/2016](#).

2.2 Running Backup Job for Microsoft Exchange Server 2007/2010/2013/2016


1. Log in to OBM.
2. Click the **Backup** icon on the main interface of OBM.



3. Select the backup set which you would like to start a backup for.

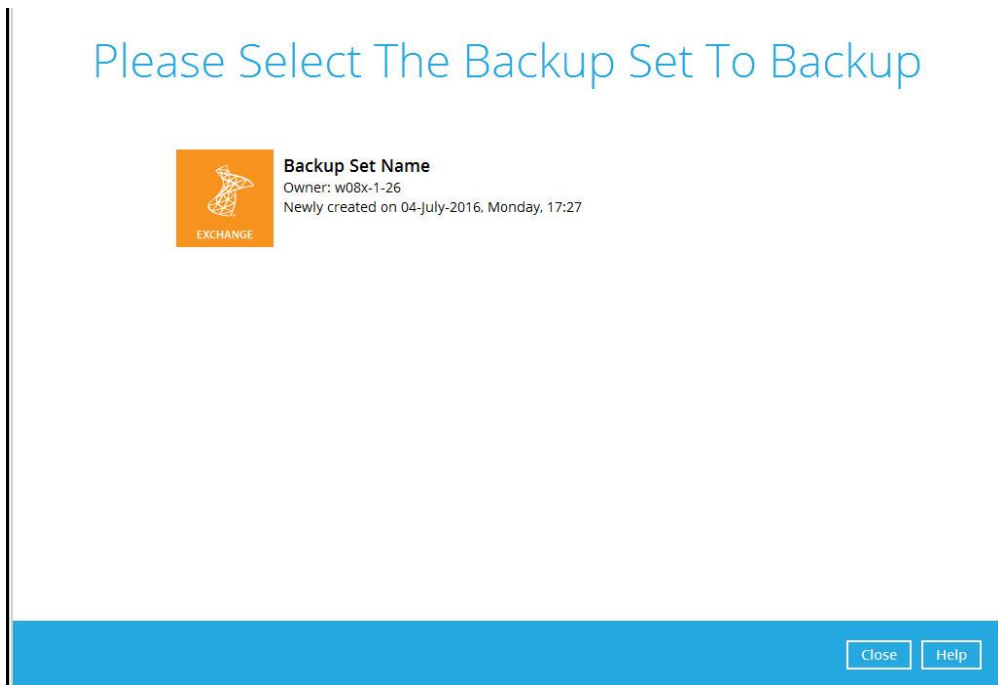

4. If you would like to modify the In-File Delta type, Destinations and Retention Policy settings, click **Show advanced option**.

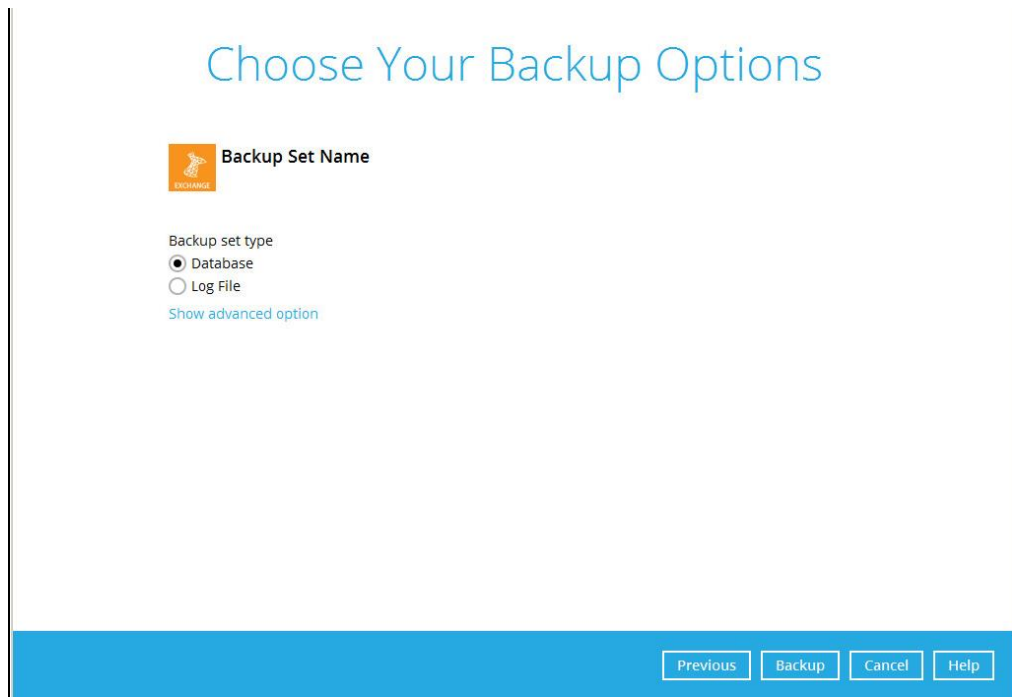

Choose Your Backup Options

 Backup Set Name


Backup set type

☒ Database

☐ Log File

[Show advanced option](#)

Previous Backup Cancel Help

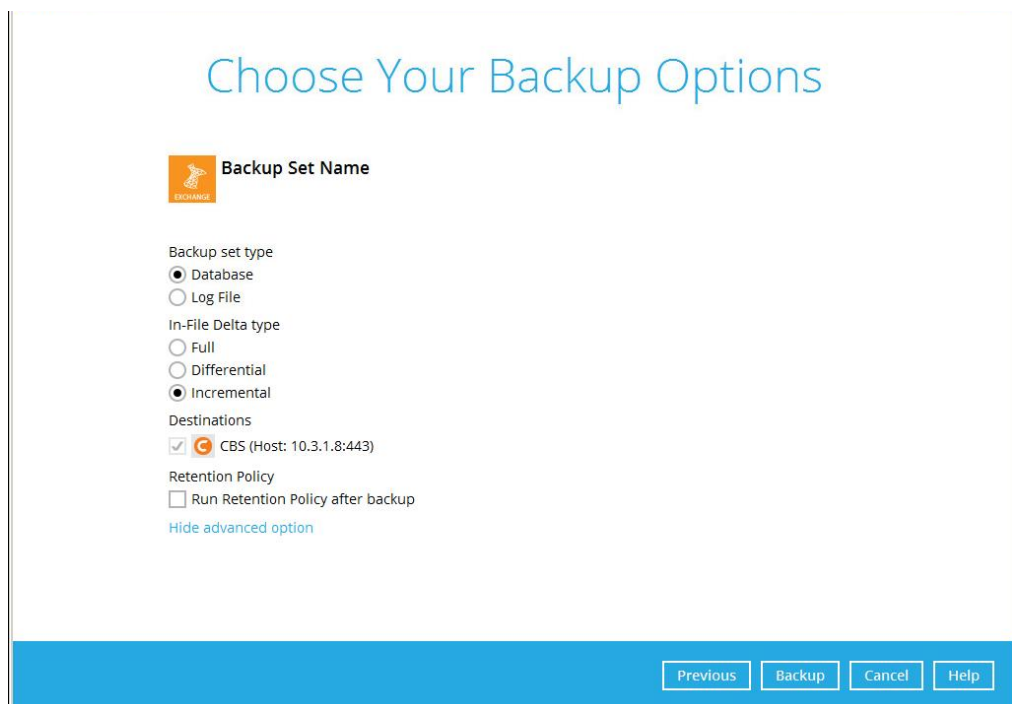

Choose Your Backup Options

 Backup Set Name

Backup set type

☒ Database

☐ Log File

In-File Delta type

☐ Full

☐ Differential

☒ Incremental

Destinations

☒ CBS (Host: 10.3.1.8:443)

Retention Policy

☐ Run Retention Policy after backup

[Hide advanced option](#)

Previous Backup Cancel Help

Refer to [Appendix A Exchange Server Backup Type](#) for more information regarding the backup set type.

5. Click **Backup** to start the backup.


3 Restoring Microsoft Exchange Server 2007/2010/2013/2016

3.1 Pre-restoration Requirements

Before you get started with restoring your database using the OBM, there are a couple of steps you may need to perform first.


1. Prepare the operating system for the Exchange Server restore (if required). Install the original version of Windows and Exchange Server (with the same level of service pack installed as in the original system).
2. Restore Windows Active Directory (if required). Restore the System State data from the backup server, and then restore the System State using WBAAdmin.exe.
3. Install OBM (if required). Refer to the Online Backup Manager v7 Quick Start Guide for Windows.
4. Make sure the **Microsoft Exchange Information Store** services from Windows Services is started.

Launch **Services** in Windows by clicking **Start** then typing “Services” in the search box. After launching the Services window, look for **Microsoft Exchange Information Store** and check the Status column to confirm if it is started. If it is not, right click the item then select **Start**.

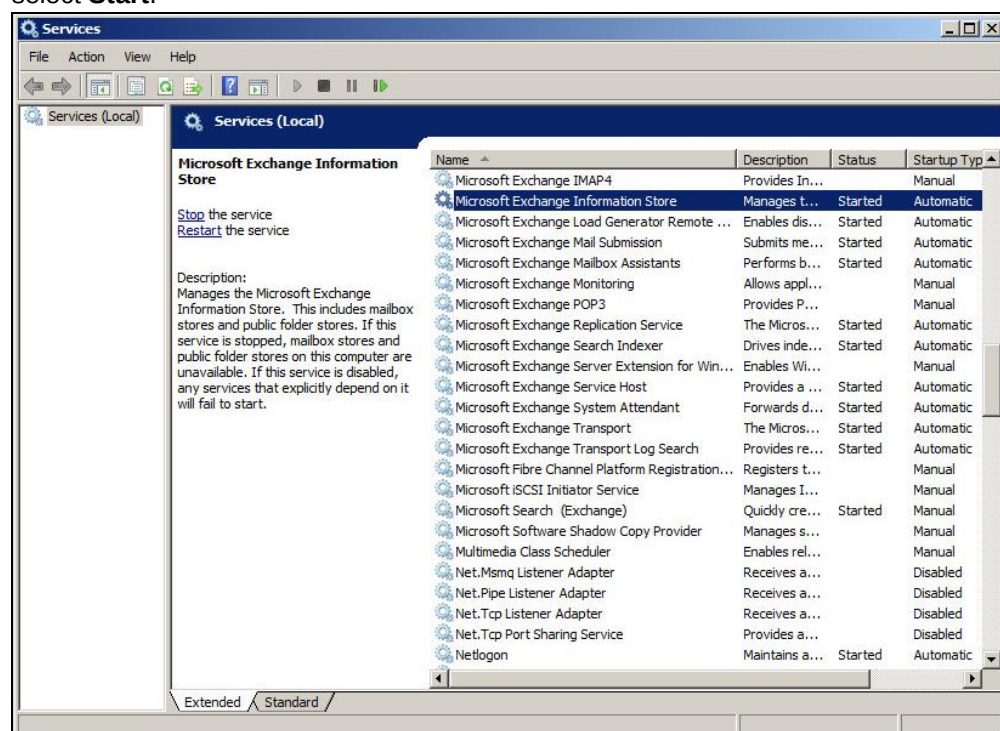


3.2 Restoring Exchange Database for Microsoft Exchange Server 2007/2010/2013/2016

1. Make sure you have followed the steps in Section 3.1 before proceeding to this section.
2. In the OBM main interface, click the **Restore** icon.
3. Select the backup set that you would like to restore database from.

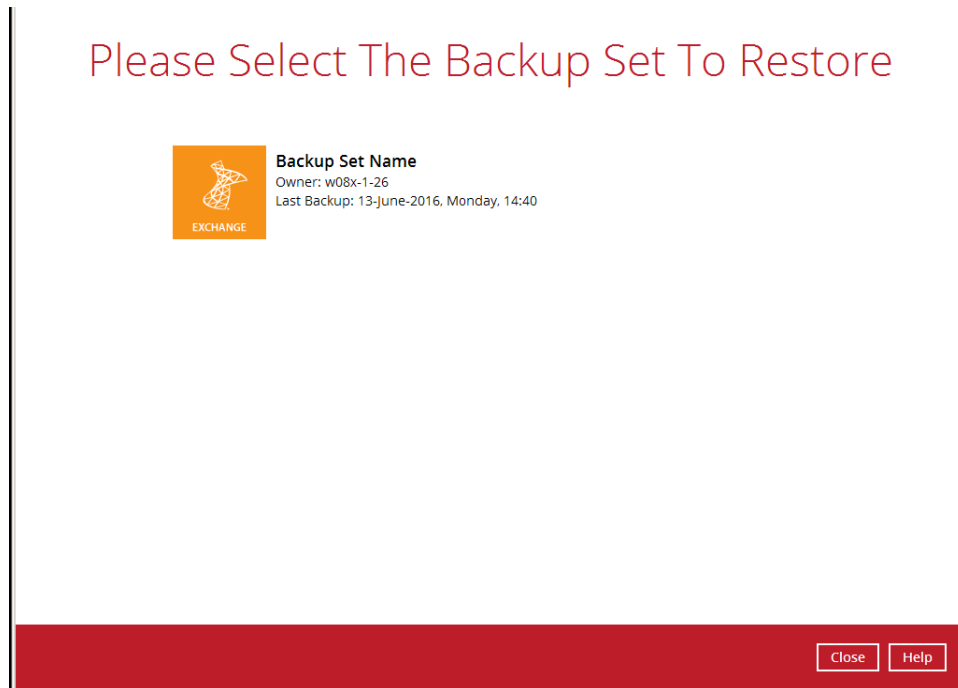


4. Select the backup destination that contains the database you would like to restore.

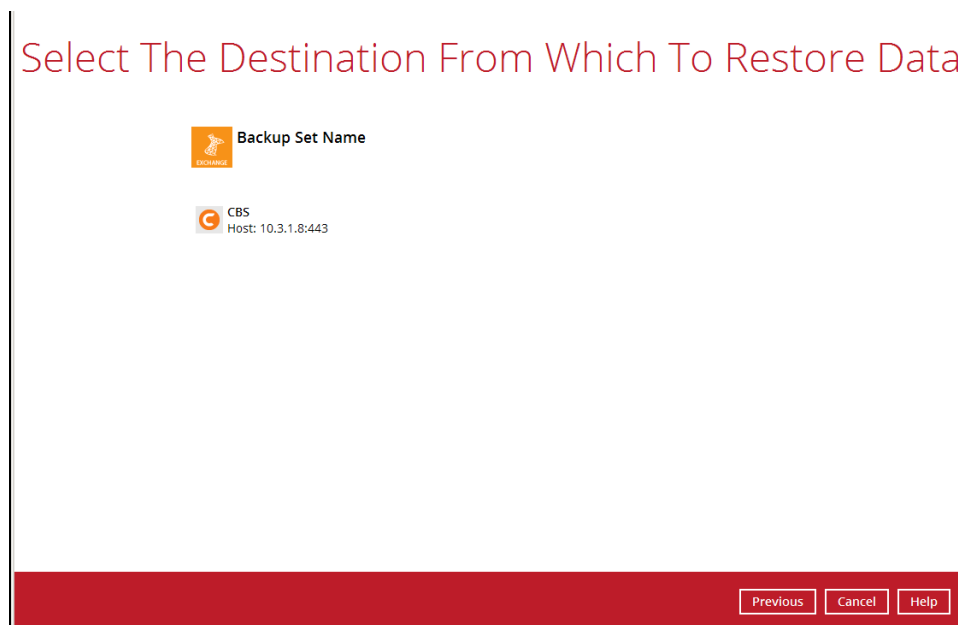

- Click to expand the menu tree to select which Information Store to restore. You can also select individual database file to restore by clicking the **Restore raw file** checkbox at the left bottom corner.

In addition, you can also choose to restore backup item(s) from a specific backup job using the drop-down menu at the top. Click **Next** to proceed when you are done with the selection.

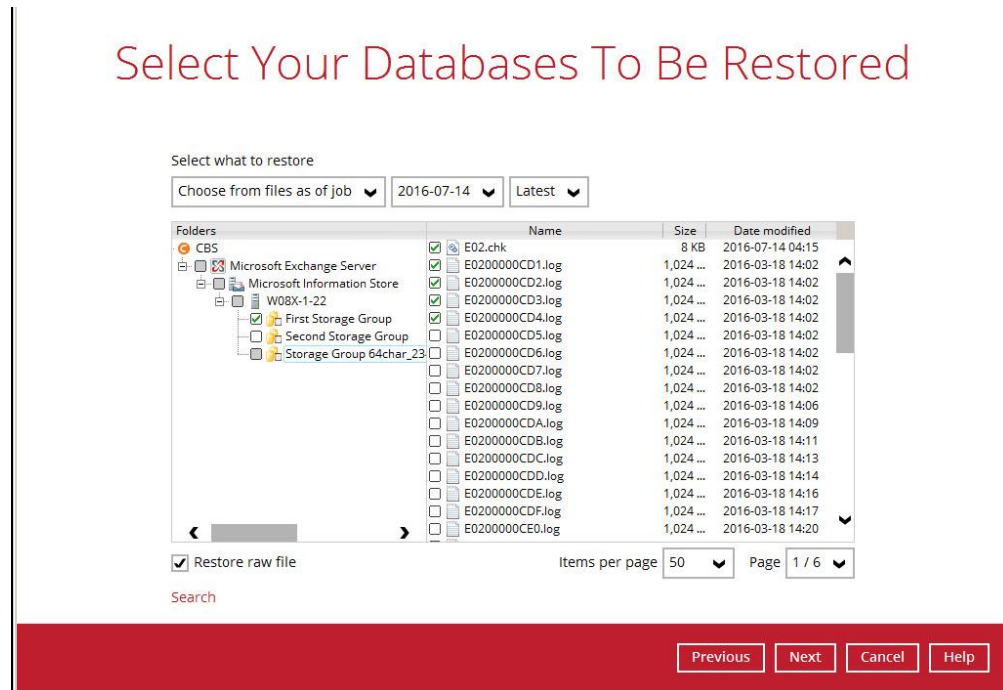

- Select to restore the database to its Original location, or to an Alternate location.

☒ **Restore to Original location**

Select the **Original location** option, then press **Next** to proceed.



• **Restore to Alternate location**

- a) Select the **Alternate location** option, then press **Next** to proceed.

Choose Where The Databases To Be Restored

Restore databases to

☐ Original location

☒ Alternate location

Previous Next Cancel Help

- b) Select the locations where you would like to restore the database to. Name the new mailbox store, then click **Browse** to modify the database, log and checksum file location if necessary. Click **Next** to proceed when you are done with the settings.

Alternate database

Database name


Mailbox Database 2-1

Original Name	New Location	
Mailbox Database 2.edb	E:\Microsoft Exchange Server\V14\Mailbox\Mailbox Database 2	Browse
E02*.log	E:\Microsoft Exchange Server\V14\Mailbox\Mailbox Database 2	Browse
E02.chk	E:\Microsoft Exchange Server\V14\Mailbox\Mailbox Database 2	Browse

Previous Next Cancel Help

7. Select the temporary directory for storing temporary files, such as delta files when they are being merged, click **Restore** to start the restoration.

8. The following screen with the text **Restore Completed Successfully** shows when the restoration is completed.

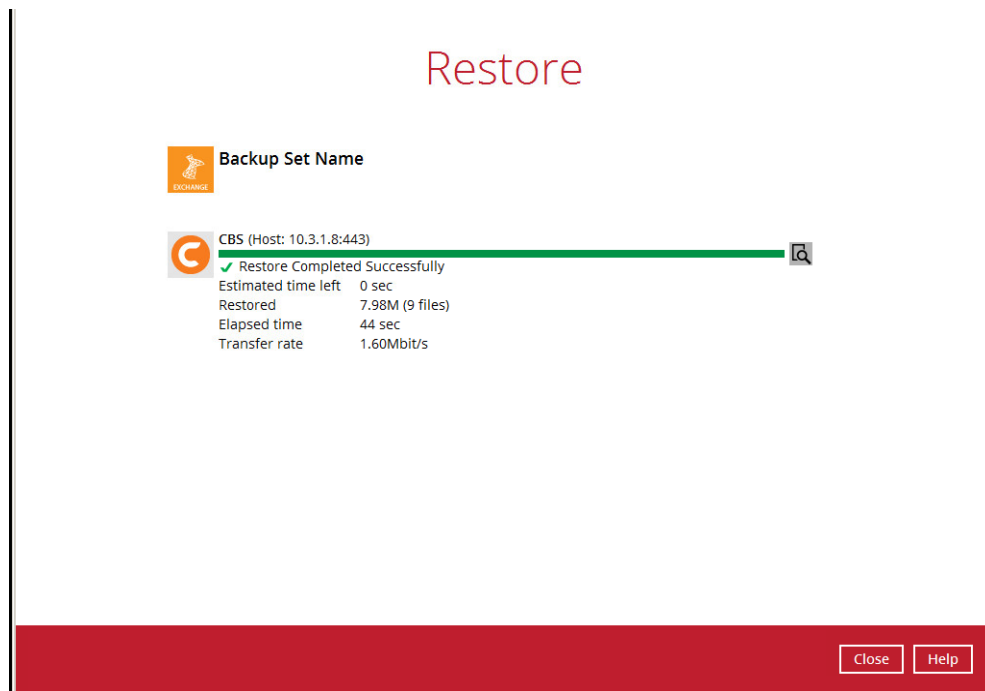

- For details regarding verifying the restoration activities log between OBM and the Exchange Server, refer to [Appendix B Restore Activities Log](#).


4 Backing up Microsoft Exchange Server in Database Availability Group (DAG)

4.1 License Requirement to Backup all Exchange Server 2010/2013/2016 in DAG environment


One OBM license CAL with one Exchange Server Add-on Module is deducted from each installation of the OBM on the DAG environment. Please check with your backup service provider if more OBM with Exchange backup is required.

4.2 Creating Backup Set for Microsoft Exchange Server 2010/2013/2016 (DAG)

1. Click the **Backup Sets** icon on the main interface of OBM.

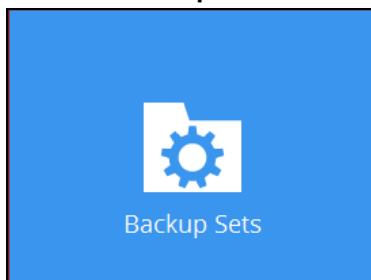

2. Create a new backup set by clicking the "+" icon next to **Add new backup set**.
3. Select the Backup set type as **MS Exchange Server Backup**. Make sure you choose the correct Exchange Server version with "Database Availability Group". Name your new backup set and then click **Next** to proceed.

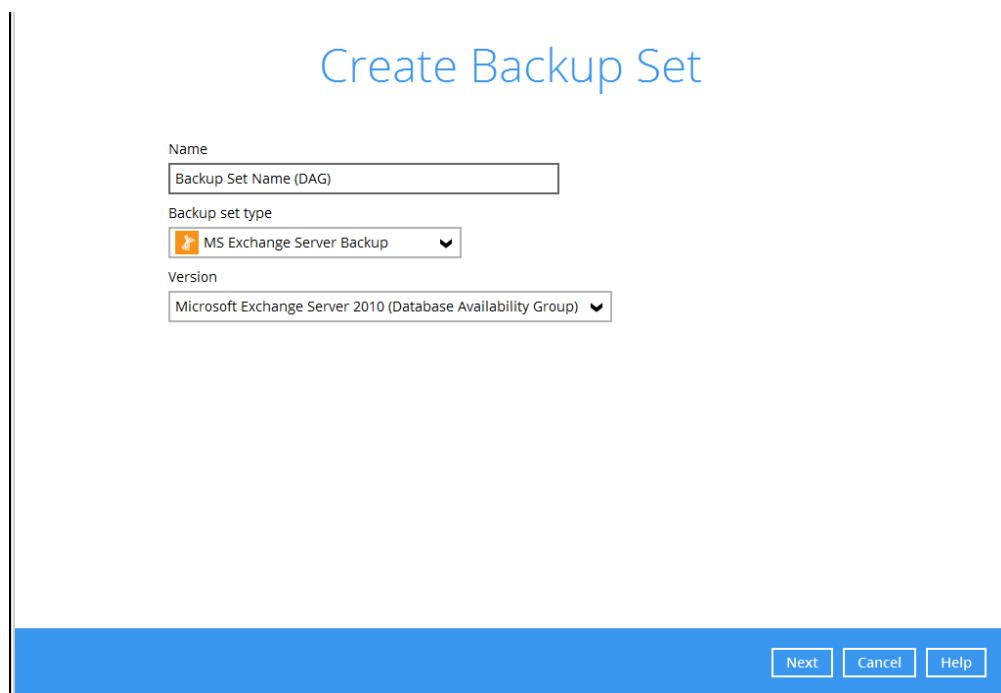A screenshot of a "Create Backup Set" dialog box. The title "Create Backup Set" is at the top in blue. Below it are three input fields: "Name" with the placeholder "Backup Set Name (DAG)", "Backup set type" with a dropdown menu showing "MS Exchange Server Backup" and a plus icon, and "Version" with a dropdown menu showing "Microsoft Exchange Server 2010 (Database Availability Group)". At the bottom right, there are three buttons: "Next", "Cancel", and "Help".

Create Backup Set


Name
Backup Set Name (DAG)

Backup set type
MS Exchange Server Backup


Version
Microsoft Exchange Server 2010 (Database Availability Group)

Next Cancel Help

4. In the Backup Source menu, select the Information Store for backup. Click **Next** to proceed.

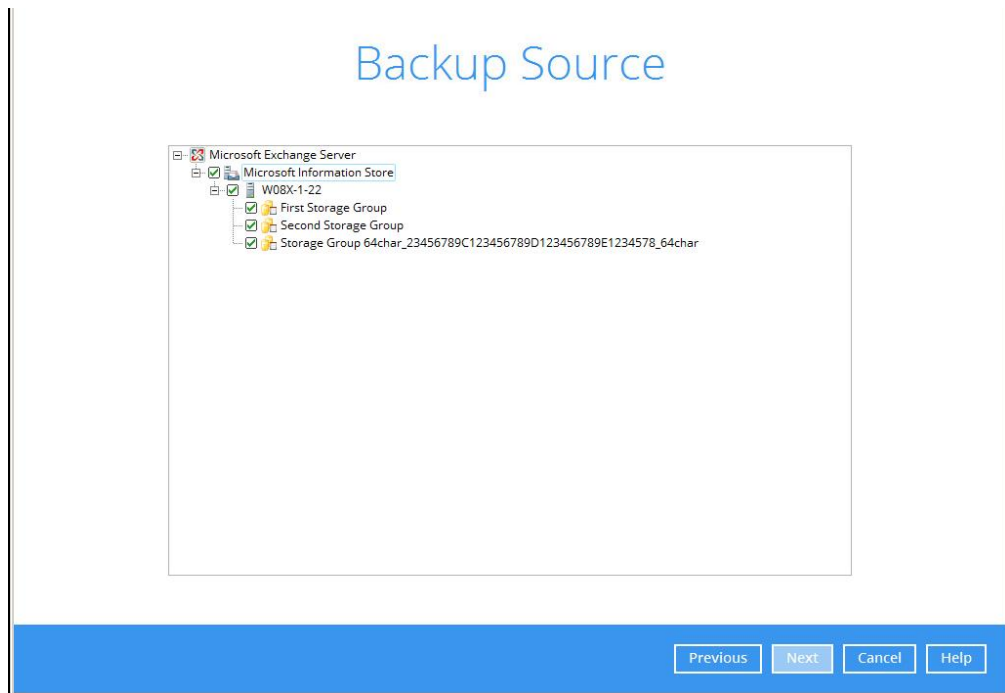

In the Schedule menu, you can configure a backup schedule for backup job to run automatically at your specified time interval. Click **Add** to add a new schedule, then click **Next** to proceed when you are done setting.

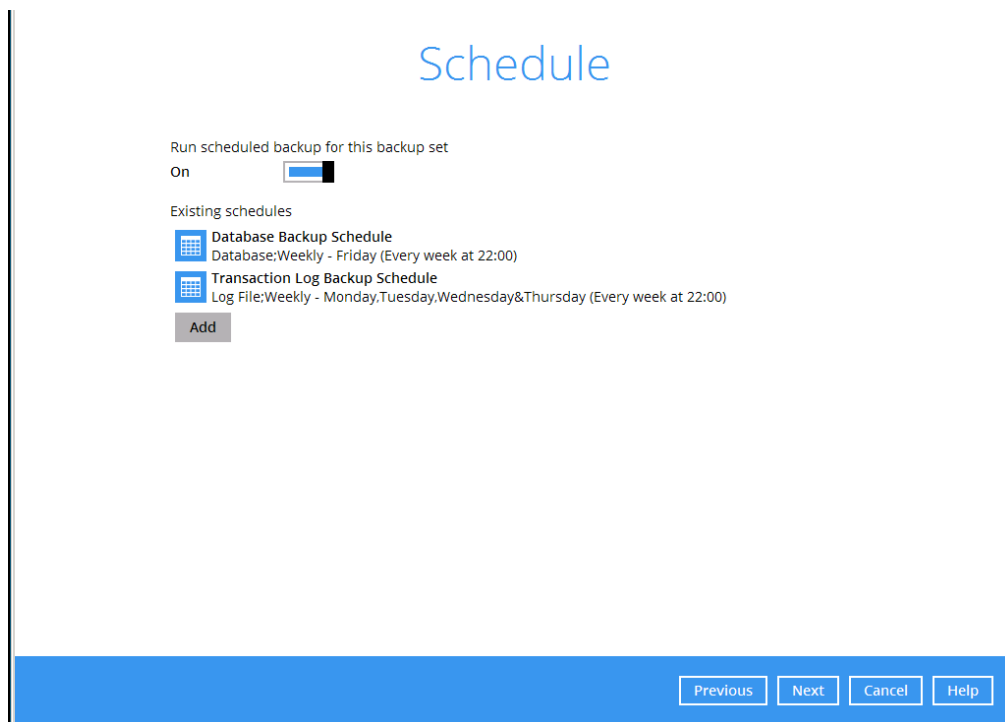

Note: By default, a database backup scheduled for every Friday at 22:00 and a log backup scheduled daily (except Friday) at 22:00 are created.

5. In the Destination menu, select a backup destination where the backup data will be stored. Click the “+” icon next to **Add new storage destination / destination pool**.

Destination

Backup mode
Sequential ▼

Existing storage destinations
+ Add new storage destination / destination pool
^ v

Previous Next Cancel Help

6. Select the destination type and destination storage, then click **OK** to proceed.

New Storage Destination / Destination Pool


Name
CBS

Type
☒ Single storage destination
☐ Destination pool

Destination storage
CBS ▼


OK Cancel Help

7. When you are done with the settings, click **Next** on the Destination menu page to proceed.

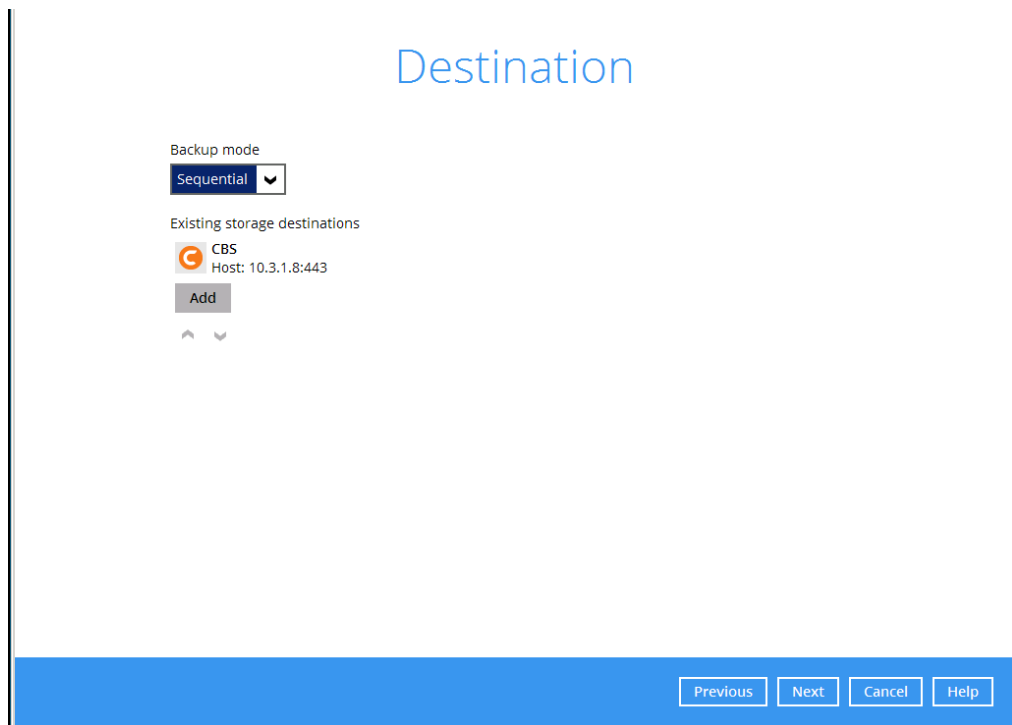

The screenshot shows the 'Destination' configuration window. At the top, the title 'Destination' is displayed in blue. Below it, the 'Backup mode' is set to 'Sequential' in a dropdown menu. Under 'Existing storage destinations', there is a list showing 'CBS' with a host of '10.3.1.8:443'. An 'Add' button is located below the list. At the bottom right, there are four buttons: 'Previous', 'Next', 'Cancel', and 'Help'.

8. In the Encryption window, the default **Encrypt Backup Data** option is enabled with an encryption key preset by the system which provides the most secure protection.

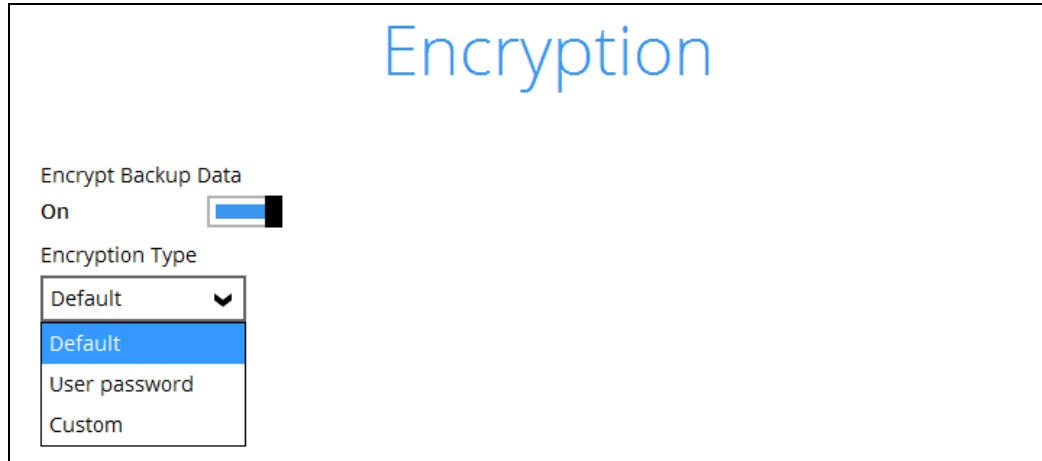


The screenshot shows the 'Encryption' configuration window. At the top, the title 'Encryption' is displayed in blue. Below it, the 'Encrypt Backup Data' option is set to 'On' with a toggle switch. Under 'Encryption Type', a dropdown menu is open, showing three options: 'Default' (selected), 'User password', and 'Custom'.

You can choose from one of the following three Encryption Type options:

- **Default** – an encryption key with 44 alpha numeric characters will be randomly generated by the system
- **User password** – the encryption key will be the same as the login password of your OBM at the time when this backup set is created. Please be reminded that if you change the OBM login password later, the encryption keys of the backup sets previously created with this encryption type will remain unchanged.


- **Custom** – you can customize your encryption key, where you can set your own algorithm, encryption key, method and key length.

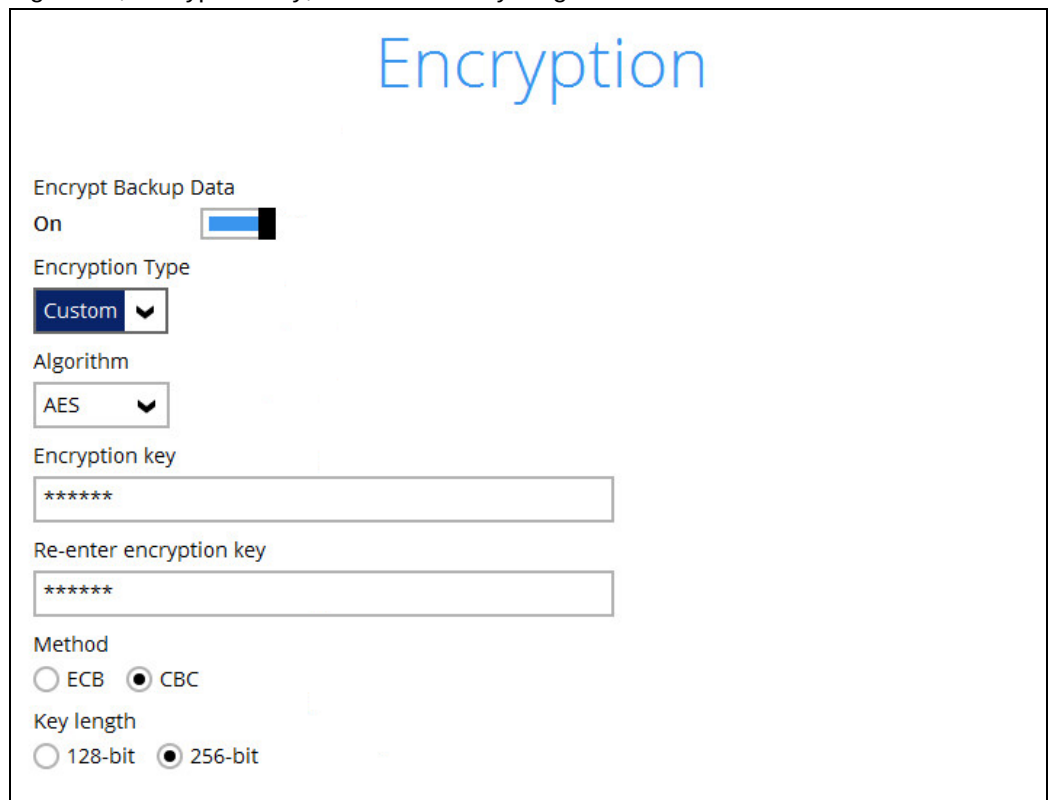

WARNING: If a note of the encryption key is NOT taken, and the key is LOST, the data will be irretrievable. Always ensure you take a note of the encryption key.


Click **Next** when you are done setting.

9. If you have enabled the Encryption Key feature in the previous step, the following pop-up window shows, no matter which encryption type you have selected.

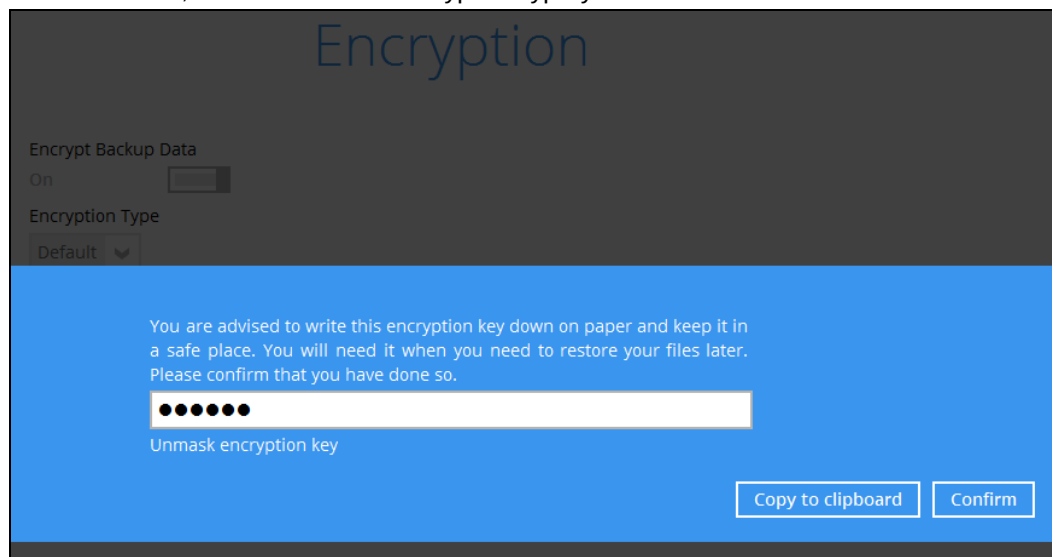

The pop-up window has the following three options to choose from:


- **Unmask encryption key** – The encryption key is masked by default. Click this option to show the encryption key.

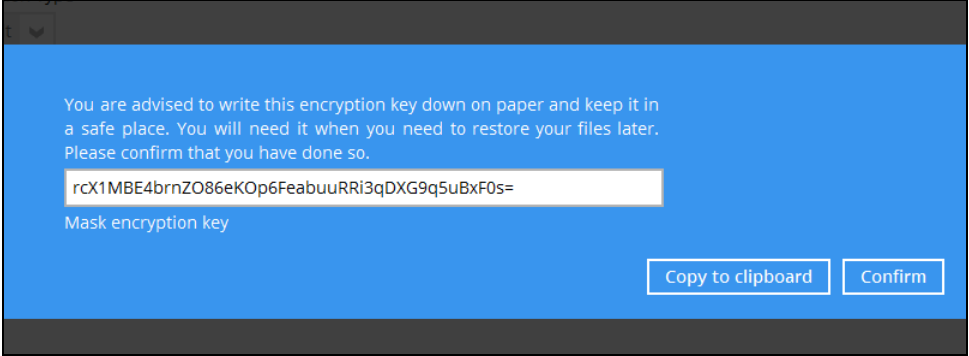

A screenshot of a Windows User Authentication pop-up window. The window has a blue header and a white body. The text inside reads: "You are advised to write this encryption key down on paper and keep it in a safe place. You will need it when you need to restore your files later. Please confirm that you have done so." Below this text is a text box containing the encryption key: "rcX1MBE4brnZO86eKOp6FeabuuRRi3qDXG9q5uBxF0s=". Below the text box is a label "Mask encryption key". At the bottom right of the window are two buttons: "Copy to clipboard" and "Confirm".


- **Copy to clipboard** – Click to copy the encryption key, then you can paste it in another location of your choice.
- **Confirm** – Click to exit this pop-up window and proceed to the next step

10. Enter the Windows login credentials for user authentication. Click **Next** to proceed.

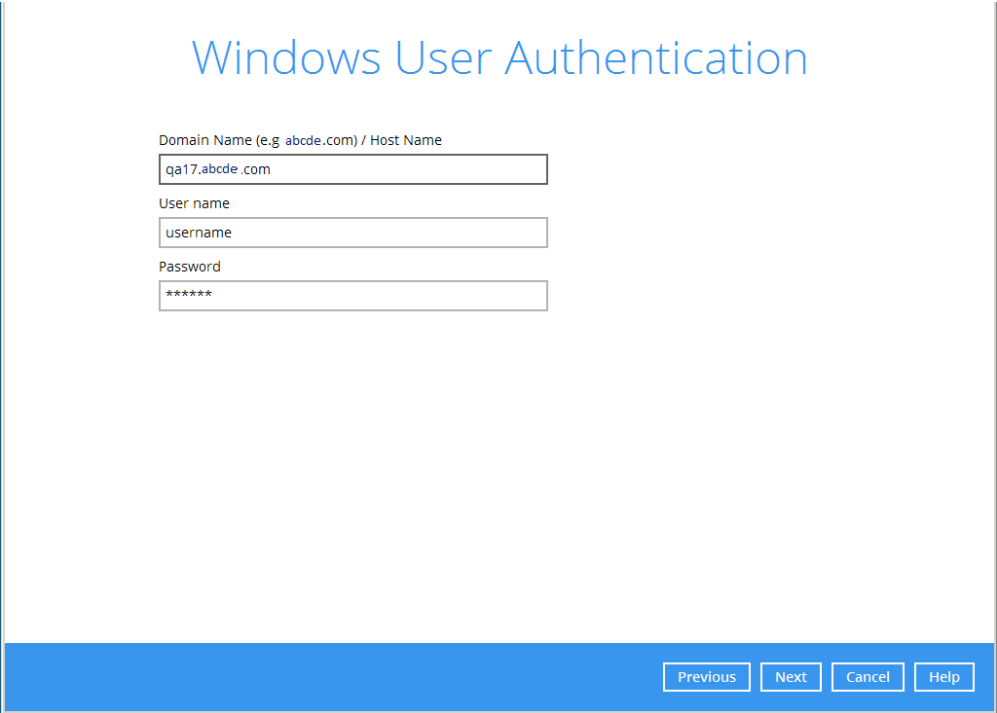


A screenshot of the Windows User Authentication login screen. The title "Windows User Authentication" is displayed in blue. Below the title are three input fields: "Domain Name (e.g. abcde.com) / Host Name" with the value "qa17.abcde.com", "User name" with the value "username", and "Password" with the value "*****". At the bottom of the screen are four buttons: "Previous", "Next", "Cancel", and "Help".

11. The following screen shows when the new backup set is created successfully. Backup will run automatically at the configured scheduled time.

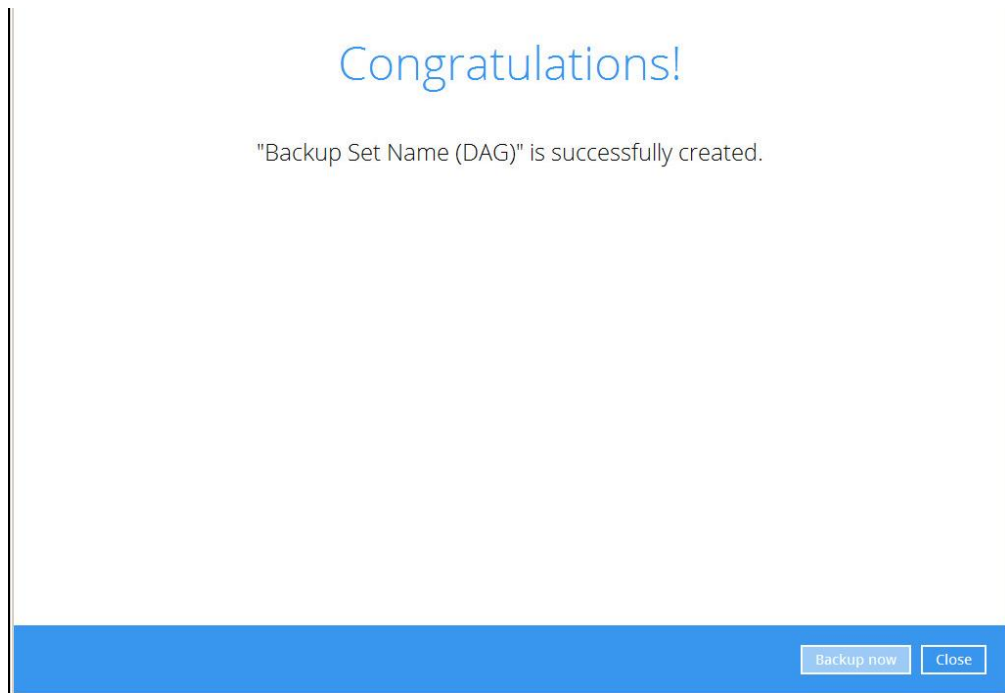

12. On all other Exchange Servers within the same DAG, logon to OBM using the same login account. Click the same backup set, and make sure the **Run scheduled backup for this backup set** is turned on the **Backup Schedule** menu page. Make sure you save the setting before exiting the application.

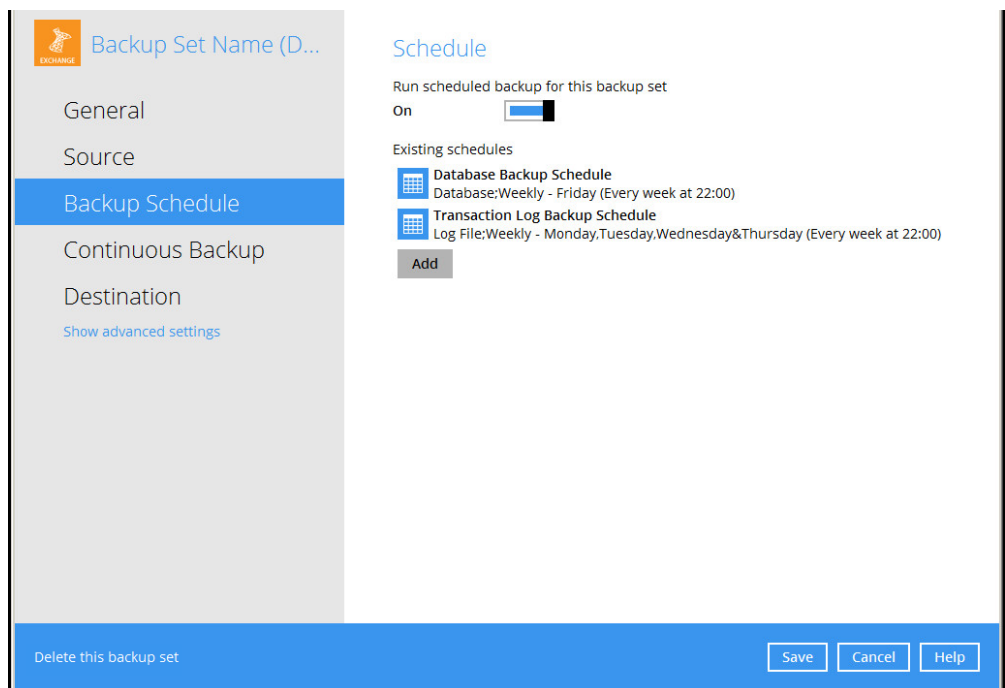

5 Restore Microsoft Exchange Server 2010/2013/2016 in Database Availability Group (DAG)

5.1 Pre-restoration requirements

Refer to the following instructions to restore your Exchange database in Database Availability Group (DAG).

The database restoration is required to restore on the active database only. You can identify the Exchange server with the active database from the Exchange Management Shell.

Type the following command in the Exchange Management Shell.

```
Get-MailboxDatabase | ft name, server
```

It will show which Exchange server is hosting the active mailbox database, i.e. Mailbox Database 01 and 03 are hosted on EX1, while Mailbox Database 02 and 04 are hosted on EX2.


```
[PS] C:\>Get-MailboxDatabase | ft name, server
```

<i>Name</i>	<i>Server</i>
----	----
<i>Mailbox Database 02</i>	<i>EX2</i>
<i>Mailbox Database 01</i>	<i>EX1</i>
<i>Mailbox Database 03</i>	<i>EX1</i>
<i>Mailbox Database 04</i>	<i>EX2</i>


When you can identify which Exchange server is hosting the active database, you can logon to that Exchange server to restore the database.

5.2 Restore Exchange Database to the Exchange with the active database


1. In the OBM main interface, click **Restore**.

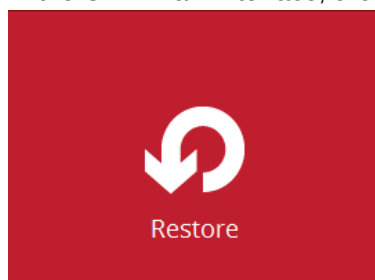

2. Select the backup set that you would like to restore data from.

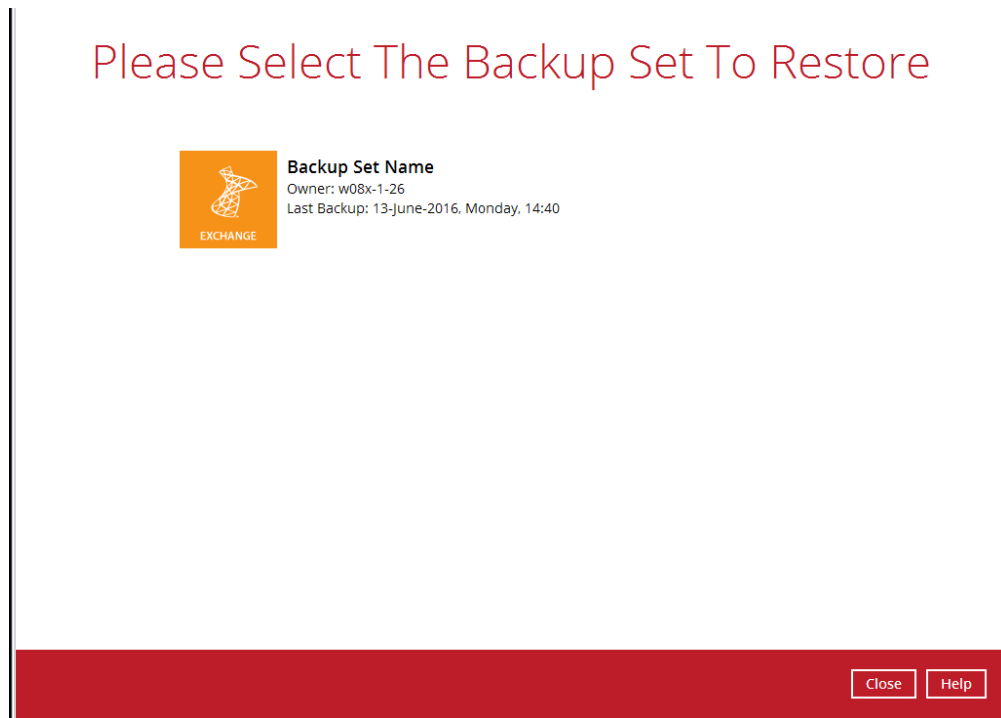


3. Select the backup destination that contains the files or folders that you would like to restore.

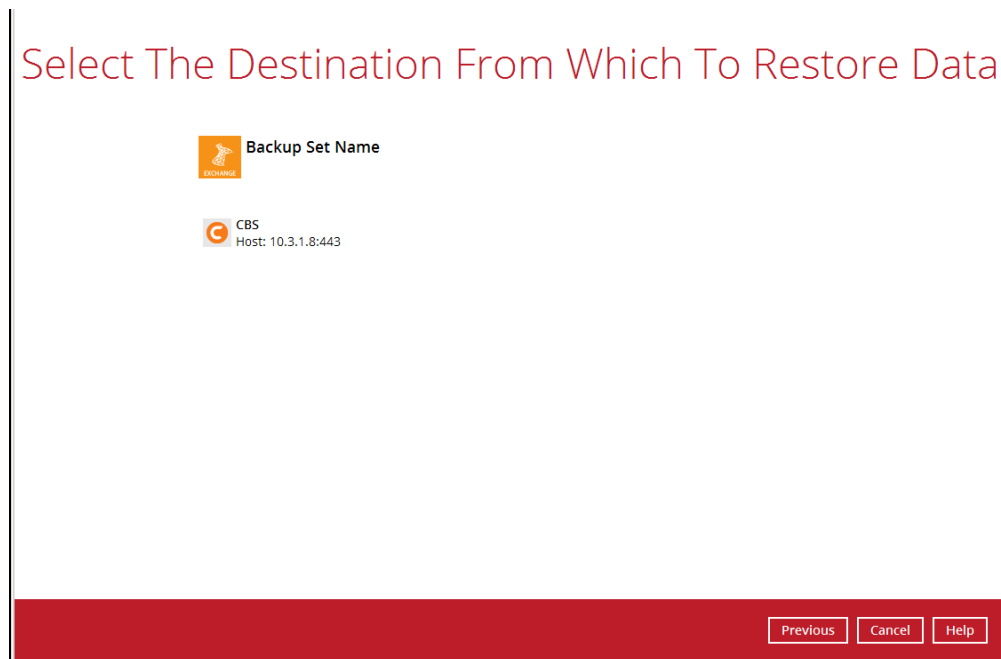

- Click to expand the menu tree to select which Information Store to restore. You can also select individual database file to restore by clicking the **Restore raw file** checkbox at the left bottom corner.

In addition, you can also choose to restore backup item(s) from a specific backup job using the drop-down menu at the top. Click **Next** to proceed when you are done with the settings.

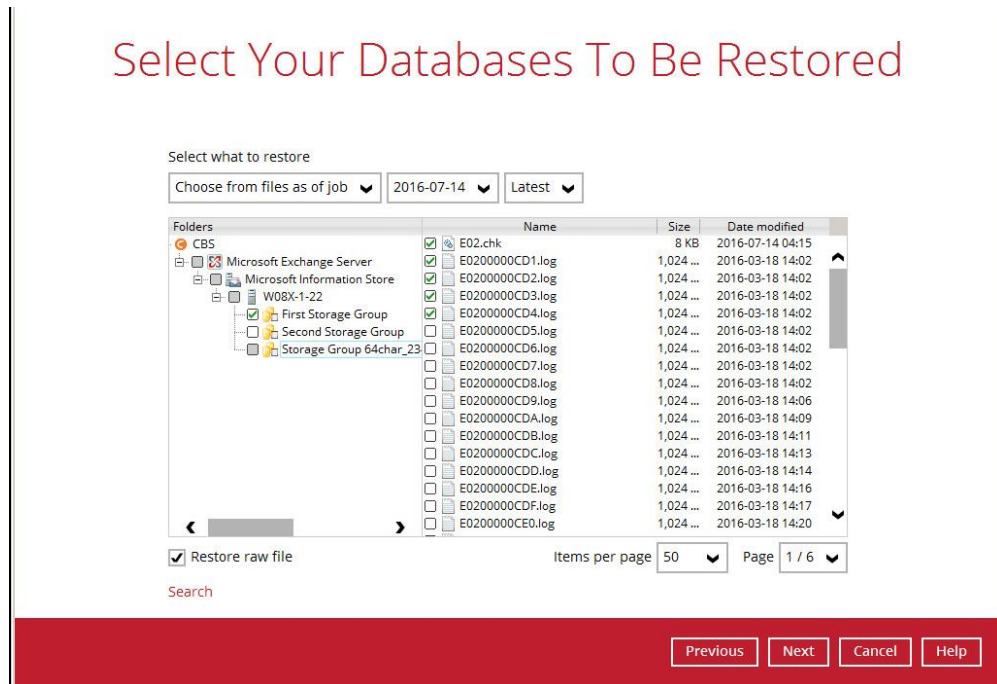

- Select to restore the files to their Original location, or to an Alternate location.

☒ **Restore to Original location**

Select the Original location option, then press **Next** to proceed.



• **Restore to Alternate location**

- a) Select the Alternate location option, then press **Next**.

The dialog box has a title bar and a main area with the text "Choose Where The Databases To Be Restored" in red. Below the title, there are two radio buttons: "Original location" (unselected) and "Alternate location" (selected). At the bottom right, there are four buttons: "Previous", "Next", "Cancel", and "Help".


- b) Select the locations where you would like to restore the database to. Name the new mailbox store, then click **Browse** to modify the database, log and checksum file location if necessary. Click **Next** to proceed.

The dialog box has a title bar and a main area with the text "Alternate database" in red. Below the title, there is a text box for "Database name" containing "Mailbox Database 2-1". Below this, there is a table with two columns: "Original Name" and "New Location". The table has three rows: "Mailbox Database 2.edb", "E02*.log", and "E02.chk". Each row has a "Browse" button to the right of the "New Location" text box. At the bottom right, there are four buttons: "Previous", "Next", "Cancel", and "Help".

Original Name	New Location
Mailbox Database 2.edb	E:\Microsoft Exchange Server\V14\Mailbox\Mailbox Database 2
E02*.log	E:\Microsoft Exchange Server\V14\Mailbox\Mailbox Database 2
E02.chk	E:\Microsoft Exchange Server\V14\Mailbox\Mailbox Database 2

6. Select the temporary directory for storing temporary files, such as delta files when they are being merged, then click **Restore** to start the restoration.

7. The following screen with the text **Restore Completed Successfully** shows when the restoration is completed.

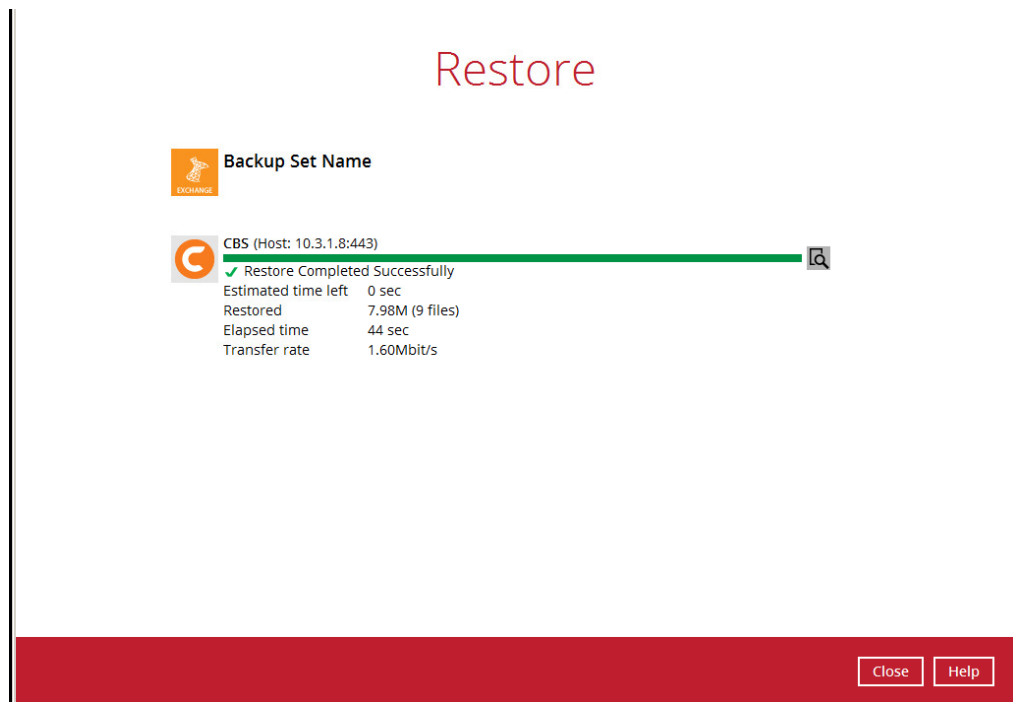

- For details regarding verifying the restoration activities log between OBM and the Exchange Server, refer to [Appendix B Restore Activities Log](#).


Appendix

Appendix A Exchange Server Backup Type

OBM utilizes the Volume Shadow Copy Service and the Microsoft Exchange Server 2010 Writers for backup of MS Exchange 2010 databases. It offers the following types of backup options:

► Database backup

Backs up the databases (EDB), transaction logs (LOG), checkpoint files (CHK), and then truncates the transaction logs for a specific database.

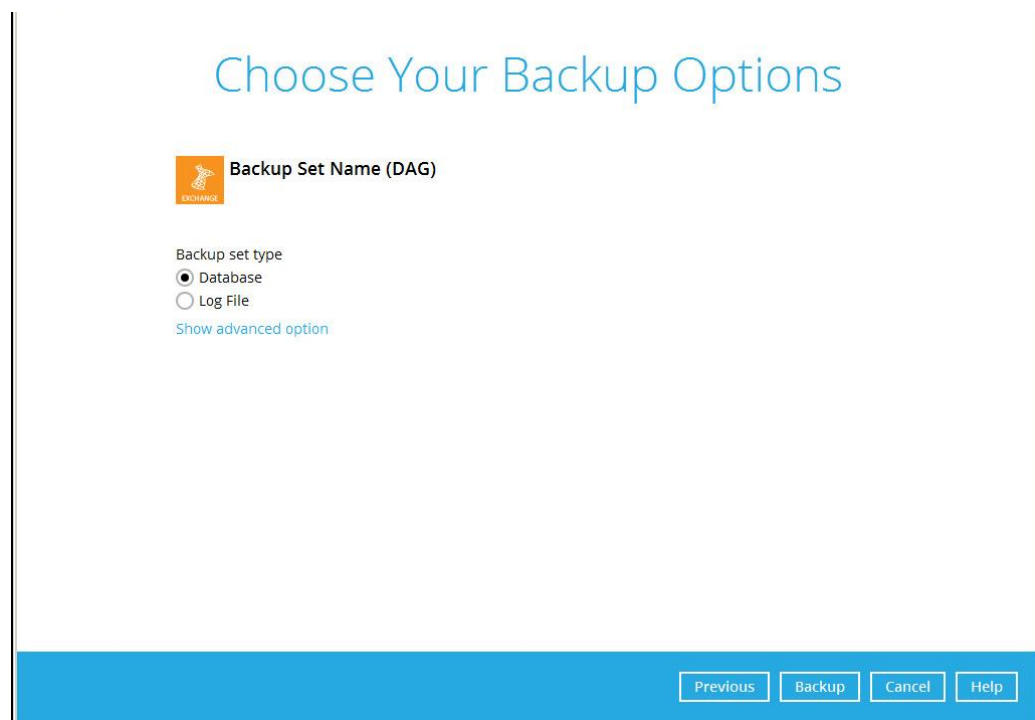

A full backup of an Exchange database creates and stores a complete copy of the database file, transaction logs, and checkpoint files. A Microsoft Exchange Server 2010 database has one set of transaction log files dedicated to that one database.

After the database has been backed up, the transaction log files on the disk are truncated so that only database changes that occur after the backup was made will remain. During this process, either the Store Writer or the Replication Service deletes all log entries up to the checkpoint, based on the assumption that the databases have now been backed up in a consistent state that contains all changes up to the most recent checkpoint.

If the database being backed up is dismounted during the backup operation, Exchange Server 2010 will not truncate the transaction logs and the result will be the equivalent of a copy backup operation, not a Full backup operation.


At the completion of Full or Incremental backups, the headers of the active mounted database get updated with the current backup information. A Full backup is required in order to run Incremental or Differential backups. There is no restriction as to which copy the Full backups are taken from as long as it is a backup.

Full backups are used in the following restoration scenarios:

- A database becomes corrupted or is lost, but the transaction log files on disk are intact. In this scenario, the affected database files can be restored from the Full backup, and then recovered by replaying the transaction logs that are still on disk.
- Transaction log files, as well as the database file on disk, are lost. In this scenario, the transaction log files that were backed up at the time of the Full backup are restored together with the database.

• **Log File backup**

Backs up the transaction logs (LOG) to record changes since the last full or incremental backup, and then truncates the transaction logs.

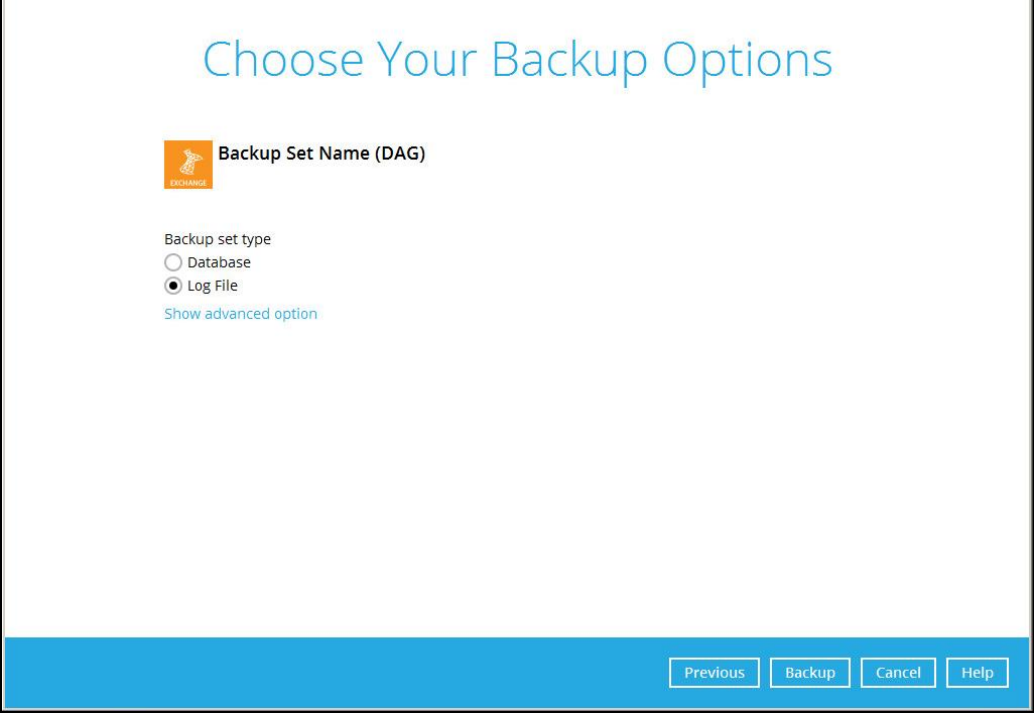

An Incremental backup of Microsoft Exchange Server 2010 database saves changes to the database that have occurred since the last Full or Incremental backup. When all the database files and log files are restored to the system, they can be recovered to the state they were in at the time of the last Incremental backup. The data stored in an Incremental backup includes only the transaction log files up to the current time.

When the backup is completed, the Exchange Server truncates the log files and marks the backup time in the database headers. Using an Incremental backup to recover a database requires the restoration of at least two data sets: the last Full backup, and then every Incremental backup taken after the last Full backup. The benefit of using Incremental backup is that an individual Incremental backup is much smaller than a Full backup and an individual Incremental backup is often smaller than an individual Differential backup.

The disadvantage of using Incremental backups is that if there are many Incremental backups made between Full backups, recovering the storage group may involve recovering many Incremental backups. Exchange does not allow an Incremental backup to occur when there has been no previous Full backup to establish the starting point for the incremental changes.

Appendix B Restore Activities Log

The information below demonstrates how you can verify the restoration activities log between the OBM and the Microsoft Exchange Server.

To verify the restoration activities log, open both the Restore Report in OBM and the Event Viewer in the Microsoft Exchange Server.

Opening Restore Report in OBM

1. Open OBM, then click the **Report** icon on the main interface page.
2. Click the Restore option on the left, then click the restore report you want to verify on the right. Click the **View Log** button to show all the restoration activities log.

Report

Backup

Restore

Usage

Restore Report

From

05Jun2016

To

05Jul2016

Go

Backup set

Destination

Job

Time

Status

Downloaded files*

* Unit = No of files (Download size)

View log

Exchange 2010 Database

CBS

2016-06-27, 19:16:13

2016-06-27, 19:16:13 - 19:17:13 (CST)

Completed successfully

46 (306.1M)

Exchange 2010 Datab...

CBS

27/06/2016 19:13

Completed

No. of records per page

50

Page

1 / 1

Close

Help

Report

Backup Report

Backup set

Exchange 2010 Database

Log

2016-06-27 19:16

Show

All

Type	Log	Time
Start [Windows Server 2008 (w08x-1-26), AhsayOBM v7.7.0.0]		2016/06/27 19:16:19
Initializing decrypt action...		2016/06/27 19:16:19
Initializing decrypt action... Completed		2016/06/27 19:16:20
Creating new directory... 'C:\Users\Administrator\temp\RestoreSet\1467024054408\RestoreDatabase\Microsoft Exchange ...		2016/06/27 19:16:20
Creating new directory... 'C:\Users\Administrator\temp\RestoreSet\1467024054408\RestoreDatabase\Microsoft Exchange ...		2016/06/27 19:16:20
Creating new directory... 'C:\Users\Administrator\temp\RestoreSet\1467024054408\RestoreDatabase\Microsoft Exchange ...		2016/06/27 19:16:20
Creating new directory... 'C:\Users\Administrator\temp\RestoreSet\1467024054408\RestoreDatabase\Microsoft Exchange ...		2016/06/27 19:16:20
Downloading... 'C:\Users\Administrator\temp\RestoreSet\1467024054408\RestoreDatabase\Microsoft Exchange Server\I...		2016/06/27 19:16:20
Downloading... 'C:\Users\Administrator\temp\RestoreSet\1467024054408\RestoreDatabase\Microsoft Exchange Server\I...		2016/06/27 19:16:20
Downloading... 'C:\Users\Administrator\temp\RestoreSet\1467024054408\RestoreDatabase\Microsoft Exchange Server\I...		2016/06/27 19:16:20
Downloading... 'C:\Users\Administrator\temp\RestoreSet\1467024054408\RestoreDatabase\Microsoft Exchange Server\I...		2016/06/27 19:16:20
Downloading... 'C:\Users\Administrator\temp\RestoreSet\1467024054408\RestoreDatabase\Microsoft Exchange Server\I...		2016/06/27 19:16:20
Downloading... 'C:\Users\Administrator\temp\RestoreSet\1467024054408\RestoreDatabase\Microsoft Exchange Server\I...		2016/06/27 19:16:20
Downloading... 'C:\Users\Administrator\temp\RestoreSet\1467024054408\RestoreDatabase\Microsoft Exchange Server\I...		2016/06/27 19:16:20
Downloading... 'C:\Users\Administrator\temp\RestoreSet\1467024054408\RestoreDatabase\Microsoft Exchange Server\I...		2016/06/27 19:16:20
Downloading... 'C:\Users\Administrator\temp\RestoreSet\1467024054408\RestoreDatabase\Microsoft Exchange Server\I...		2016/06/27 19:16:20
Downloading... 'C:\Users\Administrator\temp\RestoreSet\1467024054408\RestoreDatabase\Microsoft Exchange Server\I...		2016/06/27 19:16:20
Downloading... 'C:\Users\Administrator\temp\RestoreSet\1467024054408\RestoreDatabase\Microsoft Exchange Server\I...		2016/06/27 19:16:20
Downloading... 'C:\Users\Administrator\temp\RestoreSet\1467024054408\RestoreDatabase\Microsoft Exchange Server\I...		2016/06/27 19:16:20
Downloading... 'C:\Users\Administrator\temp\RestoreSet\1467024054408\RestoreDatabase\Microsoft Exchange Server\I...		2016/06/27 19:16:20
Downloading... 'C:\Users\Administrator\temp\RestoreSet\1467024054408\RestoreDatabase\Microsoft Exchange Server\I...		2016/06/27 19:16:20
Downloading... 'C:\Users\Administrator\temp\RestoreSet\1467024054408\RestoreDatabase\Microsoft Exchange Server\I...		2016/06/27 19:16:20

Logs per page


1000

Page


1 / 1

Opening Event Viewer in Microsoft Exchange Server

1. Click the Start button on the left bottom corner in the Exchange Server, then type Event Viewer in the search bar at the bottom.

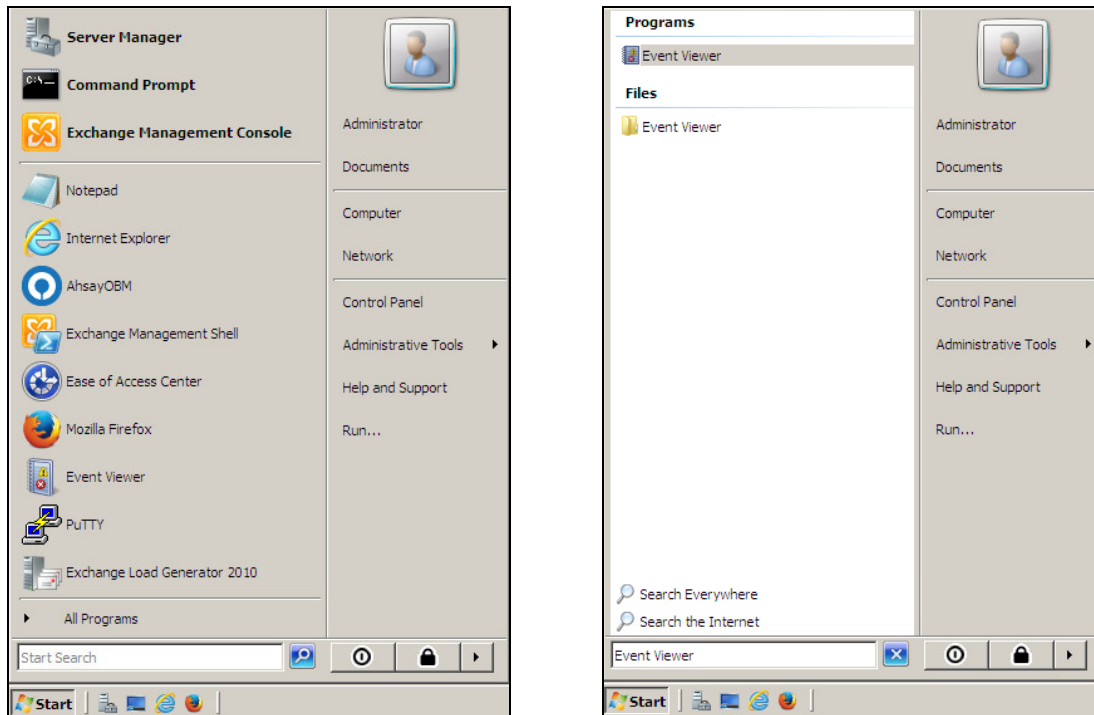

2. When the Event Viewer is opened, click **Windows Log** on the left to expand the menu tree, then select **Application**. All Application activities logs are shown on the right now.

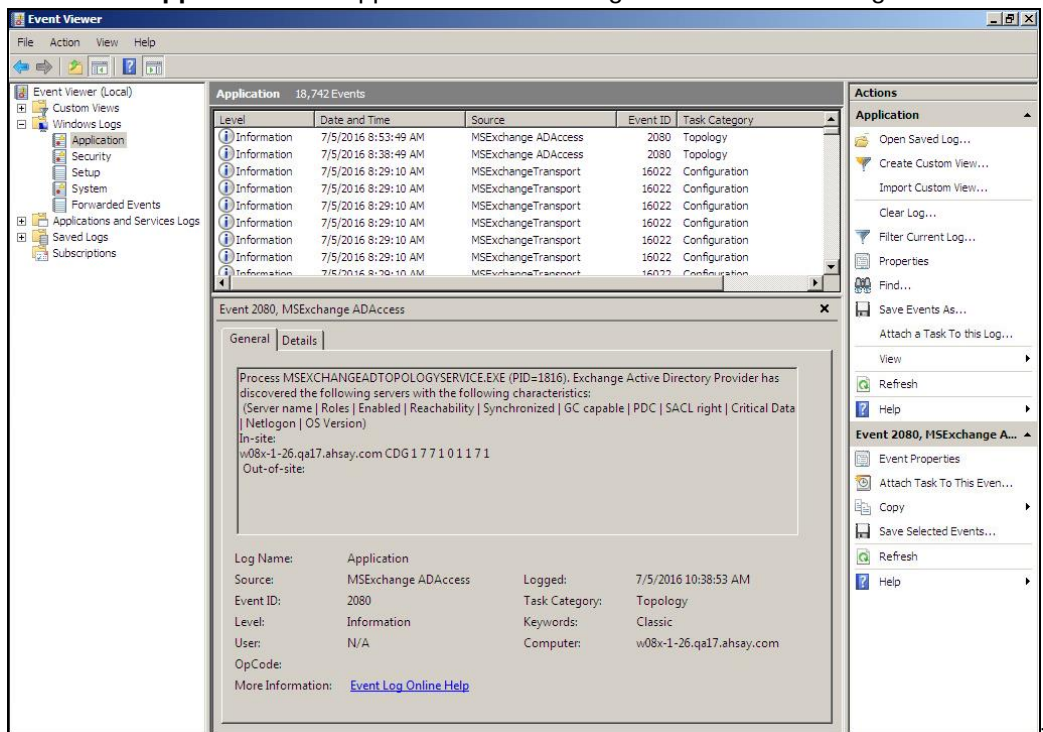

Cross-checking activities log on OBM Restore Report and Exchange Server Event Viewer

Each restoration action item initiated by OBM represented by individual activity log in the Restore Report in OBM, and the corresponding action taken place in the Exchange Server is shown in the Event Viewer as well.

There are 5 major parts to take place during the database restoration progress as shown below.

1. Download files from CBS to Temp Folder

OBM Restore Report

	Downloading... "C:\Users\Administrator\temp\RestoreSet\1467615269126\RestoreDatabase\Microsoft Exchange S
	Downloading... "C:\Users\Administrator\temp\RestoreSet\1467615269126\RestoreDatabase\Microsoft Exchange S

2. Dismount Exchange Server Database

OBM Restore Report

	Dismount Microsoft Exchange Server Database... "Mailbox Database 1524644718"
---	--

Event Viewer in Exchange Server

	Information	7/5/2016 12:18:36 PM	MSEExchangeRepl	3161	Service
---	-------------	----------------------	-----------------	------	---------

General Details

Active Manager dismounted database Mailbox Database 1524644718 on server w08x-1-26.qa17.ahsay.com.

3. Restore files to Exchange Server Database

OBM Restore Report

	Restoring files to Microsoft Exchange Server Database... "E:\Microsoft Exchange Server\V14\Mailbox\M
	Restoring files to Microsoft Exchange Server Database... "E:\Microsoft Exchange Server\V14\Mailbox\M

Event Viewer in Exchange Server

	Information	7/5/2016 12:19:14 PM	ESE	301	Logging/Recover
---	-------------	----------------------	-----	-----	-----------------

General Details

Information Store (236) Mailbox Database 1524644718: The database engine has successfully completed recove

For more information, click <http://www.microsoft.com/contentredirect.asp>.

4. Remount Exchange Server Database

OBM Restore Report

 Re-mount Microsoft Exchange Server Database... "Mailbox Database 1524644718"

Event Viewer in Exchange Server

 Information	7/5/2016 12:19:18 PM	MSEExchangeRepl	3156	Service
---	----------------------	-----------------	------	---------

General

Details

Active Manager successfully mounted database Mailbox Database 1524644718 on server w08x-1-26.qa17.ahsay.com.

5. Delete files from Temp Folder

By default, temporary files will be deleted from the temp folder after backup. This feature can be turned on or off by following the steps below.

1. Open OBM, then click the Backup Set icon on the main interface.
2. Select the backup set you would like to change this setting.
3. Click "Show advanced settings" on the left, then select "Others".
4. Use the "Remove temporary files after backup" checkbox to enable or disable this feature.

